



California Department of Water Resources
Sustainable Groundwater Management Program

December 2016

Best Management Practices for the
Sustainable Management of Groundwater

Water Budget

BMP

State of California
Edmund G. Brown Jr., Governor
California Natural Resources Agency
John Laird, Secretary for Natural Resources
Department of Water Resources
Mark W. Cowin, Director

Carl A. Torgersen, Chief Deputy Director

Office of the Chief Counsel
Spencer Kenner

Public Affairs Office
Ed Wilson

Government and Community Liaison
Anecita S. Agustinez

Office of Workforce Equality
Stephanie Varrelman

Policy Advisor
Waiman Yip

Legislative Affairs Office
Kasey Schimke, Ass't Dir.

Deputy Directors

Gary Bardini

Integrated Water Management

William Croyle

Statewide Emergency Preparedness and Security

Mark Anderson

State Water Project

John Pacheco (Acting)

California Energy Resources Scheduling

Kathie Kishaba

Business Operations

Taryn Ravazzini

Special Initiatives

Division of Integrated Regional Water Management

Arthur Hinojosa Jr., Chief

Prepared under the direction of:

David Gutierrez, Sustainable Groundwater Management Program Manager

Rich Juricich, Sustainable Groundwater Management Branch

Prepared by:

Trevor Joseph, BMP Project Manager

Timothy Godwin

Dan McManus

Mark Nordberg

Heather Shannon

Steven Springhorn

With assistance from:

DWR Region Office Staff

Water Budget Best Management Practice

1. OBJECTIVE

The objective of this Best Management Practice (BMP) is to assist the use and development of *water budgets*. The Department of Water Resources (the Department or DWR) has developed this document as part of the obligation in the Technical Assistance Chapter (Chapter 7) of the Sustainable Groundwater Management Act (SGMA) to support the long-term sustainability of California's groundwater *basins*. Information provided in this BMP provides technical assistance to Groundwater Sustainability Agencies (GSAs) and other stakeholders on how to address water budget requirements outlined in the Groundwater Sustainability Plan (GSP) Emergency Regulations (GSP Regulations). This BMP identifies available resources to support development, implementation, and reporting of water budget information.

This BMP includes the following sections:

1. Objective. The objective and brief description of the contents of this BMP.
2. [Use and Limitations](#). A brief description of the use and limitations of this BMP.
3. [Water Budget Fundamentals](#). A description of fundamental water budget concepts.
4. [Relationship of Water Budgets to other BMPs](#). A description of how the water budget BMP relates to other BMPs and how water budget information may be used to support development of other GSP requirements.
5. [Technical Assistance](#). A description of technical assistance to support the development of a water budget, potential sources of information, and relevant datasets that can be used to further define each component.
6. [Key Definitions](#). Definitions relevant for this BMP as provided in the GSP Regulations, Basin Boundary Regulations, SGMA, and DWR *Bulletin 118*.
7. [Related Materials](#). References and other materials that provide supporting information related to the development of water budget estimates.

2. USE AND LIMITATIONS

This BMP is intended only to provide technical assistance to GSAs and other stakeholders. GSAs and other stakeholders may use this BMP. The BMP does not create any new requirements or obligations for the GSA or other stakeholders. This BMP is not a substitute for the GSP Regulations and SGMA. Those submitting a GSP are strongly encouraged to read the GSP Regulations and SGMA. In addition, using this BMP to

develop a GSP does not equate to an approval by the Department. All references to GSP Regulations relate to Title 23 of the California Code of Regulations (CCR), Division 2, Chapter 1.5, and Subchapter 2. All references to SGMA relate to California Water Code sections in Division 6, Part 2.74.

3. WATER BUDGET FUNDAMENTALS

Earth's water is moved, stored, and exchanged between the atmosphere, land surface, and the subsurface according to the hydrologic cycle (**Figure 1**). The hydrologic cycle begins with evaporation from the ocean. As the evaporated water rises, the water vapor cools, condenses, and ultimately returns to the Earth's surface as precipitation (rain or snow). As the precipitation falls on the land surface, some water may infiltrate into the ground to become groundwater, some water may run off and contribute to streamflow, some may evaporate, and some may be used by plants and transpired back into the atmosphere to continue the hydrologic cycle (Healy, R.W. et al., 2007).

A water budget takes into account the storage and movement of water between the four physical systems of the hydrologic cycle, the atmospheric system, the land surface system, the river and stream system, and the groundwater system. A water budget is a foundational tool used to compile water inflows (supplies) and outflows (demands). It is an accounting of the total groundwater and surface water entering and leaving a basin or user-defined area. The difference between inflows and outflows is a change in the amount of water stored.

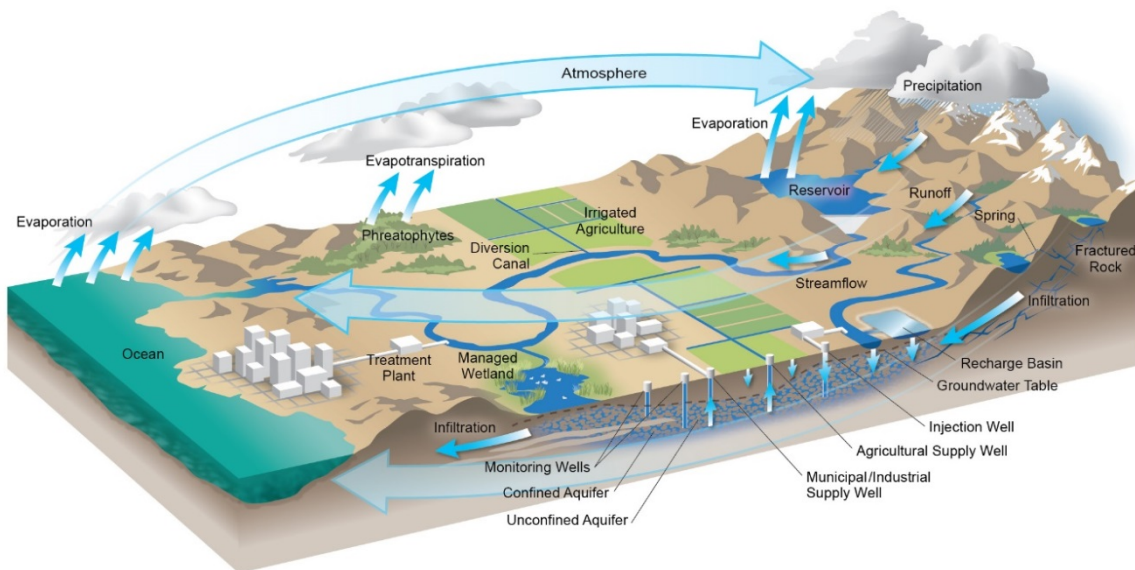


Figure 1 – The Hydrologic Cycle

In resource management it's said, "You can't manage what you don't measure." Similar to a checking account, water budget deposits (inflows) and withdrawals (outflows) are tracked and compared over a given time period to identify if the change in account balance is positive (increase in amount of water stored) or negative (decrease in the amount of water stored). During periods when inflows exceed outflows, the change in volume stored is positive. Conversely, during periods when inflows are less than outflows, the change in storage is negative. Surpluses from previous budget periods can act as a buffer towards isolated annual water budget deficits, but a series of ongoing negative balances can result in long-term conditions of overdraft.

Water budgets can be highly variable between groundwater basins. In some basins, precipitation may be the largest contributor to groundwater recharge. In other basins, leading sources of recharge may stem from infiltration and seepage of irrigation water, conveyance systems, septic systems, and various surface water systems (streams, lakes, reservoirs, etc.). In some areas, high groundwater levels result in seasonal or continuous outflow from the groundwater system to overlying surface water systems. In other basins, lower groundwater levels result in the continuous movement of water from the surface water system to the groundwater system. Assessment and comparison of annual water budget data requires using a consistent, user-defined area and period of evaluation. Under the GSP Regulations, the water budget is developed for the groundwater basin according to the annual *water year* period (October 1 to September 30).

In principle, a water budget is a simple concept that provides the accounting framework to measure and evaluate all inflows and outflows from all parts of the hydrologic cycle – atmospheric, land surface, surface water, and groundwater systems. In reality, it can be difficult to accurately measure and account for all components of the water budget for a given area. Some water budget components may be estimated independent of the water budget, while others may be calculated based on the fundamental principle that the difference between basin inflows and outflows is balanced by a change in the volume of water in storage. This principle is quantified according to the following water budget equation.

$$\text{Inflow (a, b, c)} - \text{Outflow (a, b, c)} = \text{Change in Storage}$$

Equation 1 – Water Budget Equation

Because groundwater basin inflows and outflows are balanced by a change in the amount of water in storage, the above equation may be rearranged to calculate, or “back into”, an unknown component of the water budget equation. For example, if one wishes to determine unknown Outflow component “a”, and all other components of the water budget for the groundwater system have been determined, Outflow “a” can be calculated by rearranging the above water balance equation as follows:

$$\text{Outflow (a)} = \text{Inflow (a, b, c)} - \text{Outflow (b, c)} - \text{Change in Storage}$$

To illustrate this example, consider a water budget scenario where total inflow from components “a”, “b”, and “c” equals 100 units of water; total outflow from all components other than “a” equals 40 units of water; and the annual change in storage identified through groundwater level measurements is approximately equal to +10 units of water. An estimate of outflow “a” during this period may be calculated from the above water budget equation as shown below. Note that “change in storage” is represented as a positive number to denote an increase in storage and a negative number to denote a decrease in storage.

$$\begin{aligned} \text{Outflow (a)} &= \text{Inflow (a, b, c)} - \text{Outflow (b, c)} - \text{Change in Storage} \\ 50 \text{ units} &= 100 \text{ units} - 40 \text{ units} - 10 \text{ units} \end{aligned}$$

Identifying which water budget components are most appropriate to estimate through balancing of the water budget equation will depend on the local ability to independently measure or estimate the remaining water budget components. It also depends on the relative importance, versus *uncertainty*, associated with each component in the overall water budget. A higher level of water budget uncertainty often translates to a higher risk that the projects and management actions being evaluated to achieve sustainability, based on future water budget projections, may not achieve the intended outcome within the intended timeframe.

An important consideration when implementing water resource management is the interaction between groundwater and surface water systems. *Groundwater flow* naturally moves down-gradient, from areas of high groundwater elevation to areas of lower groundwater elevation. In areas where groundwater levels are below the surface water system, the direction of groundwater flow will be from the surface water system to the groundwater system. Streams that receive water from the groundwater system are called “gaining” streams and those that lose water to the groundwater system are called “losing” streams (see **Figure 2**). The gaining or losing character of streamflow may be consistent throughout a stream system or it may be highly variable based on stream reach location and based on seasonal versus annual changes in local climatic conditions

and the water inflow (recharge) or outflow (groundwater extraction) for the basin. It is therefore important to clearly identify and characterize stream segments included in the water budget calculation.

Unless additional inflows or supplies are developed, increases in groundwater extraction may eventually result in a hydraulic disconnection between the surface water and groundwater systems in basins where these systems are currently interconnected. Groundwater systems that are disconnected from the surface water system will still receive recharge from the surface water system. However, all further extraction from the groundwater system may be largely balanced through a decline of *groundwater in storage* and/or a reduction of subsurface outflow from the basin over time.

Another important water budget consideration is stream depletion due to groundwater pumping. In basins with *interconnected surface water* systems, if inflows (recharge) to the basin remain fixed while the amount of groundwater extraction increases, the increased volume of groundwater extraction, while initially resulting in a decline in the volume of *aquifer storage*, will eventually be balanced by decreases in the groundwater flow to springs, gaining streams, groundwater-dependent ecosystems or an increase in discharge from losing streams. Shallow production wells in close proximity to surface water systems commonly capture flow directly from the surface water system through induced recharge. Stream depletion associated with pumping wells further removed from surface water systems is more commonly the result of the indirect capture of groundwater flow that would otherwise have discharged to the surface water system sometime in the future. In both situations, streamflow depletion will continue until a new equilibrium between the outflow associated with groundwater extraction and the inflow from surface water depletion is established.

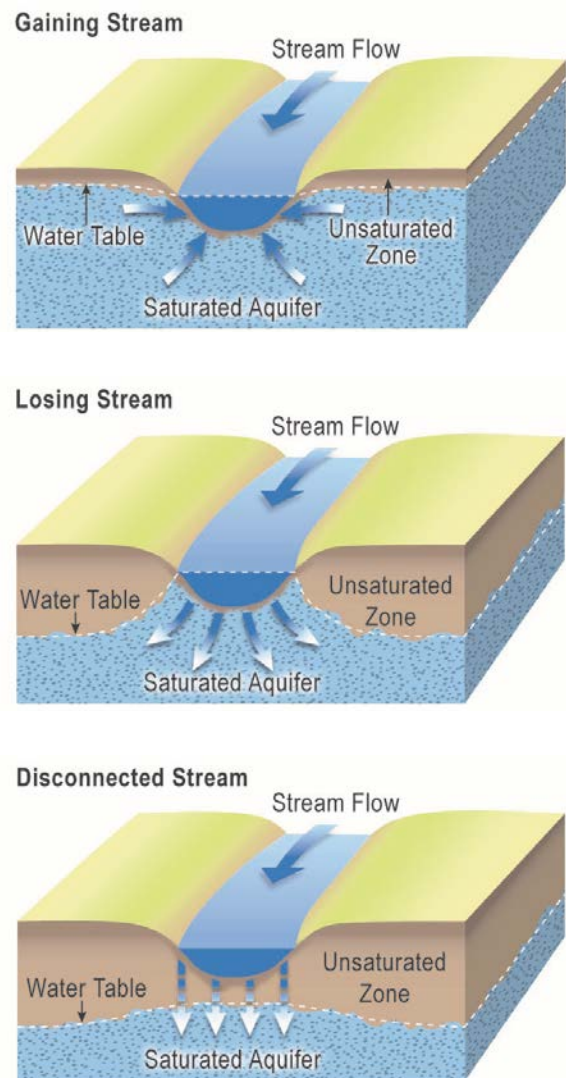


Figure 2 – Gaining, Losing, and Disconnected Streams

The transition from storage depletion to stream depletion will affect water budget accounting over time. The time lag to reach this new equilibrium is directly related to the location and construction of production wells, the thickness and hydrologic conductivity of the aquifer system, and the capacity and timing of the groundwater extraction. In many basins, stream depletion due to groundwater extraction will continue for decades prior to reaching a new equilibrium (Barlow, P.M. and Leake, S.A., 2012). Because of this transitional process, a water budget based on “average conditions” will not reflect this slow and progressive change. It’s also important to recognize that water budget accounting during early stages of groundwater basin development will have different storage and basin outflow values than water budget accounting for a later time period, when the basin is approaching equilibrium.

To accurately identify and evaluate the various inflow and outflow components of the water budget, it is important to adequately characterize the interaction between surface water and groundwater systems through sufficient monitoring of groundwater levels and streamflow conditions. The *Monitoring Networks and Identification of Data Gaps and Monitoring Protocol, Standards, and Sites* BMPs have additional information regarding GSP monitoring requirements.

Due to the complexities of characterizing stream depletion due to groundwater extraction, integrated groundwater-surface water models are often used to assist with water budget accounting and forecasting. In addition, where *interconnected surface water* systems exist, the quantification and forecasting of streamflow depletion may be extremely difficult without the use of a numerical groundwater and surface water model. Additional information regarding consideration of models under the GSP Regulations is provided in the Modeling BMP and in Section 5 of this BMP.

Water Budget Uses

Water budget accounting may be very general or very detailed, depending on the hydrologic complexities of the basin, the scale and intent of water budget accounting, and the importance of understanding the individual water budget components necessary to support water resource decision making. Some of the general and GSP Regulation-specific water budget uses and applications are provided below.

General Water Budget Uses

- Develop an accounting and characterize spatial and temporal distribution of inflows and outflows to a watershed, groundwater basin, or *management area*.

- Identify the primary *beneficial uses* and users of water and determine which water budget components are most critical to the area.
- Improve communication between the local land use planners and water resource managers.
- Estimate water budget components that are not easily measured or well understood.
- Evaluate how the surface and groundwater systems respond to the seasonal and long-term changes to supplies, demands, and climatic conditions.
- Identify the timing and volume of inflows and outflows that will result in a balanced water budget condition for a management area.
- Develop a water supply assessment of future conditions to better understand the effects of proposed land and water use changes, climate change, and other factors to the local and regional water budget.
- Inform additional monitoring needs.
- Identify the interaction between surface water and groundwater systems, including changes over time.

GSP-Related Water Budget Uses

SGMA requires local agencies to develop and implement GSPs that achieve *sustainable groundwater management* by implementing projects and management actions intended to ensure that the basin is operated within its *sustainable yield* by avoiding *undesirable results*. A key component in support of this effort is an accounting and assessment of the current, historical, and projected water budgets for the basin. The following provides a partial list of GSP-related water budget applications and uses:

- Develop an accounting and characterize spatial and temporal distribution of inflows and outflows to the basin by *water source type* and *water use sector*, to identify the main beneficial uses and users, and determine which water budget components are most critical to achieving sustainable groundwater management (§354.18(b)).
- Assess how annual changes in historical inflows, outflows, and change in basin storage vary by *water year type* (hydrology) and water supply reliability (§354.18(c)(2)).
- Develop an understanding of how historical conditions concerning hydrology, water demand, and surface water supply availability or reliability have impacted the ability to operate the basin within the sustainable yield (§10733.6(b)(3)).

- Improve coordination and communication between the GSA and water supply or management agencies, local land use approval agencies, and interested parties who may be subject to sustainable groundwater management fees (§355.4(b)(4)).
- Facilitate coordination of water budget data and methodologies between agencies preparing a GSP within the basin (§357.4) or between basins (§357.2).
- Identify *data gaps* and *uncertainty* associated with key water budget components and develop an understanding of how these gaps and uncertainty may affect implementation of proposed projects and water management actions.
- Evaluate how the surface and groundwater systems have responded to the annual historical changes in the water budget inflows and outflows (§354.18(c)(2)).
- Determine the rate and volume of surface water depletion caused by groundwater use that has adverse impacts on the beneficial uses of the surface water and may lead to undesirable results (§354.16(f) and 354.28(c)(1)).
- Identify which water budget conditions commonly result in *overdraft conditions* (354.18(b)(5)).
- Estimate the sustainable yield for the basin (§354.18 and 10727.6(g)).
- Forecast projected inflows and outflows to the basin over the *planning and implementation horizon* (§354.18(c)(3)).
- Evaluate the effect of proposed projects and management actions on future water budget projections (§354.44(b)).
- Evaluate future scenarios of water demand uncertainty associated with projected changes in local land use planning, population growth, and climate (§65362.5(a)).
- Inform monitoring requirements (§354.34(b)(4)).
- Inform development and quantification of sustainable management criteria, such as the *sustainability goal*, *undesirable results*, *minimum thresholds*, and *measurable objectives* (§354.22).
- Help identify potential projects and management actions to achieve the sustainability goal for the basin within 20 years of GSP implementation (§354.44).

Water Budgets in Reference to the GSP Regulations

With respect to the GSP Regulations, developing a water budget that accurately identifies and tracks changing inflows and outflows to a basin will be a critically important tool to support decision making.

Complexity of water budgets will vary by groundwater basin according to the local complexities of the basin hydrology, physical setting, spatial and temporal distribution of supplies and demands, historical water management practices and the presence or absence of undesirable results. Ongoing parallel efforts to monitor and verify water budget components will help improve accuracy; however, some level of uncertainty is inherent in each water budget. An important objective of water budget accounting under the GSP Regulations is to develop an understanding of what level of water budget certainty and detail is sufficient for making effective basin management decisions.

The GSP water budget requirements are not intended to be a direct measure of groundwater basin sustainability; rather, the intent is to quantify the water budget in sufficient detail so as to build local understanding of how historical changes to supply, demand, hydrology, population, land use, and climatic conditions have affected the six *sustainability indicators* in the basin, and ultimately use this information to predict how these same variables may affect or guide future management actions. Building a coordinated understanding of the interrelationship between changing water budget components and aquifer response will allow local water resource managers to effectively identify future management actions and projects most likely to achieve and maintain the sustainability goal for the basin.

Another important aspect of documenting water budget information in the GSP is to ensure the Department is provided with sufficient information to demonstrate that the GSP conforms to all SGMA and GSP Regulation requirements, and, when implemented, is likely to achieve the sustainability goal within 20 years and maintain sustainability over the 50 year planning and implementation horizon.

4. RELATIONSHIP OF THE WATER BUDGET TO OTHER BMPs

Quantifying the current, historical, and projected water budget for the basin is just one of several interrelated GSP elements the GSAs will use to help understand the basin setting, evaluate groundwater conditions, determine undesirable results, develop sustainability criteria, establish appropriate monitoring networks, and ultimately identify future projects and management actions that are likely to achieve and maintain the sustainability goal for the basin. **Figure 3** illustrates the relationship of the water budget BMP to the other BMPs, and to the overall steps towards achieving sustainability under SGMA and the GSP Regulations.

Figure 3 identifies the water budget BMP as part of the Basin Setting portion of the GSP Regulations (§354.12). However, the water budget BMP also directly supports, or is

supported by, several other BMPs and Guidance Documents such as stakeholder outreach, development of the *Hydrogeologic Conceptual Model (HCM)*, modeling, monitoring networks, monitoring protocols, and establishing sustainable management criteria. Basin monitoring feeds into the understanding of the HCM and groundwater conditions, which then supports the understanding and quantification of the water budget and model development. It ultimately supports evaluation of sustainability indicators, undesirable results, and basin management decisions to achieve the sustainability goal for the basin.

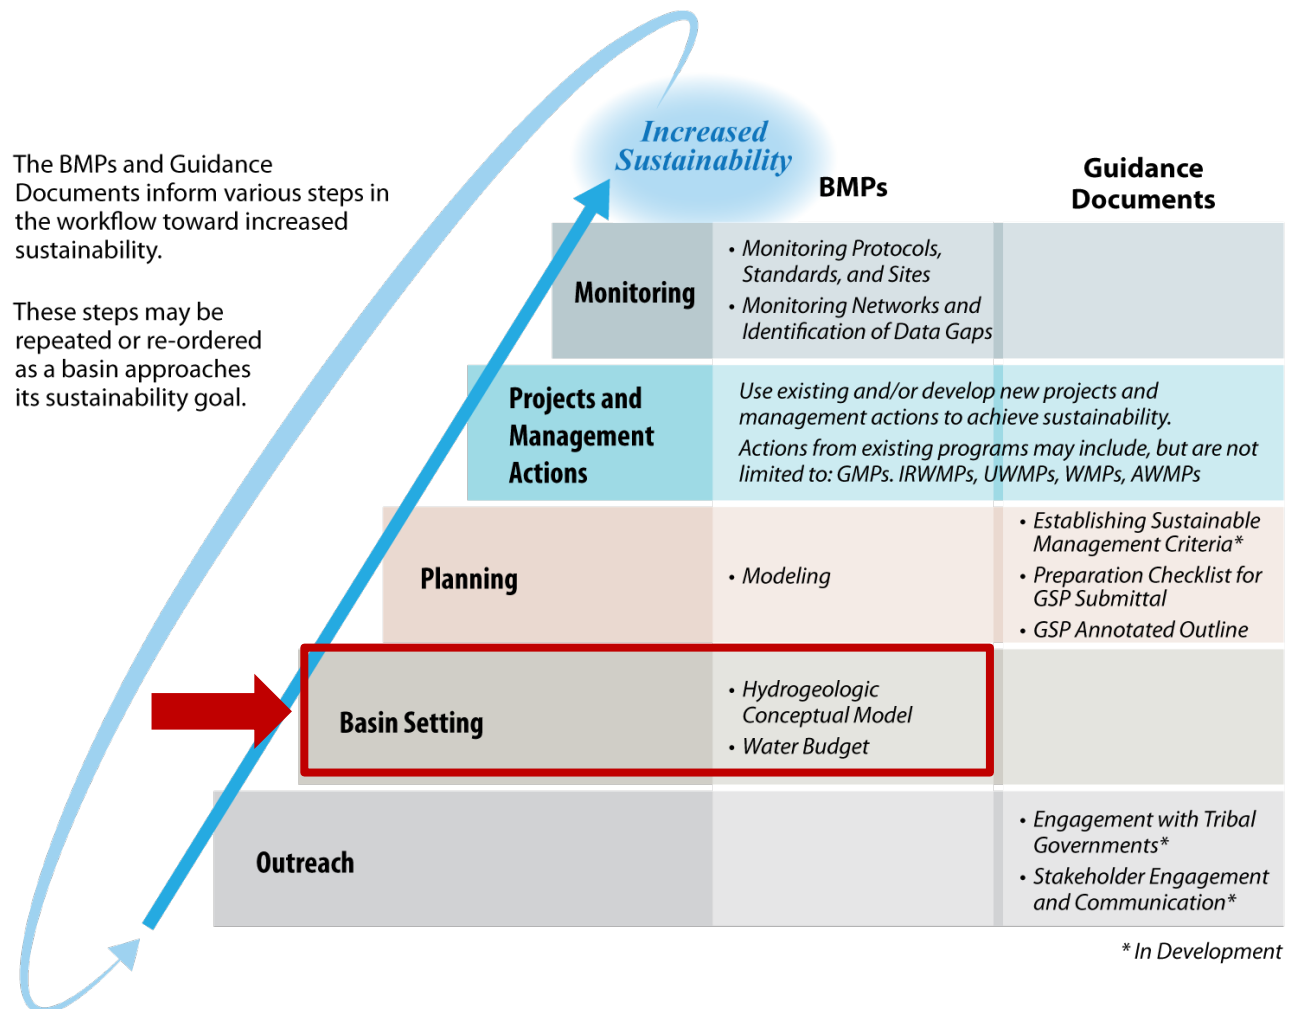


Figure 3 – Logical Progression of Basin Activities Needed to Increase Basin Sustainability

5. TECHNICAL ASSISTANCE

Implementing sustainable groundwater management under SGMA and the GSP Regulations requires development of a water budget. It should identify and account for basin inflows, outflows, and change in storage over changing temporal and spatial conditions of supply, demand, and climate with sufficient accuracy. This section provides guidance for the development of a water budget, including potential sources of information, reporting formats, and relevant datasets that can be used to further quantify and estimate the various water budget components.

GENERAL WATER BUDGET REQUIREMENTS

The following section highlights and provides guidance and technical assistance on the general requirements for all GSP-developed water budgets.

Subarticle 2. Basin Setting

23 CCR §354.12: Introduction to Basin Setting

Information provided pursuant to this Subarticle shall be prepared by or under the direction of a professional geologist or professional engineer.

Professional Certification

Water budget requirements are provided in Subarticle 2, under the Basin Setting portion of the GSP Regulations. Introduction to the basin setting stipulates that GSP water budget information, and all information provided under Subarticle 2 of the GSP Regulations, is to be prepared by or under the direction of a professional geologist or professional engineer. The qualifications and requirements for professional engineers and geologists are governed by the Professional Engineers Act (Business and Professions Code §6700) and the Geologist and Geophysicist Act (Business and Professions Code §8700). Information regarding the professional codes and licensing lookup are provided below.

- **Professional Engineers Act:** http://www.bpelsg.ca.gov/laws/pe_act.pdf
- **Professional Geologist and Geophysicist Act:** http://www.bpelsg.ca.gov/laws/gg_act.pdf
- **Professional License Lookup:** http://www.bpelsg.ca.gov/consumers/lic_lookup.shtml

Water Budget Data, Information, and Modeling Requirements

23 CCR §354.18(e): *Each Plan shall rely on the best available information and best available science to quantify the water budget for the basin in order to provide an understanding of historical and projected hydrology, water demand, water supply, land use, population, climate change, sea level rise, groundwater and surface water interaction, and subsurface groundwater flow. If a numerical groundwater and surface water model is not used to quantify and evaluate the projected water budget conditions and the potential impacts to beneficial uses and users of groundwater, the Plan shall identify and describe an equally effective method, tool, or analytical model to evaluate projected water budget conditions.*

Water Budget Data Requirements: GSP Regulations stipulate the need to use the best available information and the *best available science* to quantify the water budget for the basin. Best available information is common terminology that is not defined under SGMA or the GSP Regulations. Best available science, as defined in the GSP Regulations, refers to the use of sufficient and credible information and data, specific to the decision being made and the time frame available for making that decision, which is consistent with scientific and engineering professional standards of practice.

It is understood that initial steps to compile and quantify water budget components may be constrained by GSP timelines and limited funding, and may consequently need to rely on the best available information that is obtainable at the time the GSP is developed. Information describing potential sources of data to support the quantification of water budget components is provided later in this BMP under *Water Budget Data Resources*. This section also includes a listing of data to be provided by the Department as part of the Department's technical assistance.

As GSAs compile and assess the various water budget components for the basin, each GSA will work to identify, prioritize, and fill data gaps as an ongoing effort to further refine water budget data and information based on the best available science.

Sustainability will ultimately depend on the GSA's ability to manage the basin within the identified uncertainty of water budget information to meet the locally defined objectives and thresholds of the outcome-based sustainable management criteria identified in §354.22. However, the initial approval of the GSP by the Department requires GSAs to gather and present a level and quality of water budget information that will demonstrate the GSP will likely achieve the sustainability goal for the basin under the substantial compliance requirements in §355.2 of the GSP Regulations.

Use of Models to Determine Water Budgets: GSP Regulations do not require the use of a model to quantify and evaluate the projected water budget conditions and the potential impacts to beneficial uses and users of groundwater. However, if a model is not used, the GSA is required to describe in the GSP an equally effective method, tool, or analytical model to evaluate projected water budget conditions.

Groundwater basins with acceptable water budget conditions, minimal undesirable results, and limited proposed changes to future groundwater demands may be able to identify and describe equally effective methods or tools to quantify and forecast future water budget conditions in sufficient detail.

In basins with *interconnected surface water* systems or complex spatial and temporal variations in water budget components, quantifying and forecasting streamflow depletion and other water budget components may be extremely difficult without the use of a numerical groundwater and surface water model. Modeling results may also be an effective tool for outreach and communication, and can prove useful in analyzing and quantifying some of the more difficult-to-measure water budget components.

Additional information regarding the requirements, application, and availability of models and modeling data is provided in the Modeling BMP.

Defining Basin Area and Water Budget Systems

23 CCR §354.18(a): Each Plan shall include a water budget for the basin that provides an accounting and assessment of the total annual volume of groundwater and surface water entering and leaving the basin, including historical, current and projected water budget conditions, and the change in the volume of water stored. Water budget information shall be reported in tabular and graphical form.

Three-Dimensional Basin Area: Prior to developing a water budget for the basin, GSAs must first identify the vertical and lateral extent of the basin as described under the HCM (§354.14) portion of the GSP Regulations. The HCM is based on technical studies and qualified maps that characterize the physical basin area and the interaction of surface water and groundwater systems in the basin. It requires evaluation of the physical systems related to regional hydrology, land use, geology and geologic structure, water quality, *principal aquifers*, and *principal aquitards* in the basin. Additional information regarding development of the HCM may be found in the HCM BMP.

The lateral boundaries of the basin are determined by the Department and conform to those boundaries provided in Bulletin 118. The vertical basin boundary, or definable bottom of the basin, is determined by the GSA and may be delineated by either, 1) a structural barrier to groundwater flow as determined by local geology, or 2) the base of fresh water as determined by groundwater quality information. In general, deep portions of the basin not part of the groundwater flow path can be excluded from analysis; conversely, if the those portions of the basin are part of the flow path or are being managed, they should be included in the analysis. Basin boundaries may be periodically modified through SGMA under §10722.

In addition to the lateral and vertical basin boundaries, the water budget accounting takes into consideration the exchange of water between subsystems within the hydrologic cycle. **Figure 4** is a generalized schematic illustrating the potential interaction between water budget components and the surface water system and groundwater system for a groundwater basin or management area.

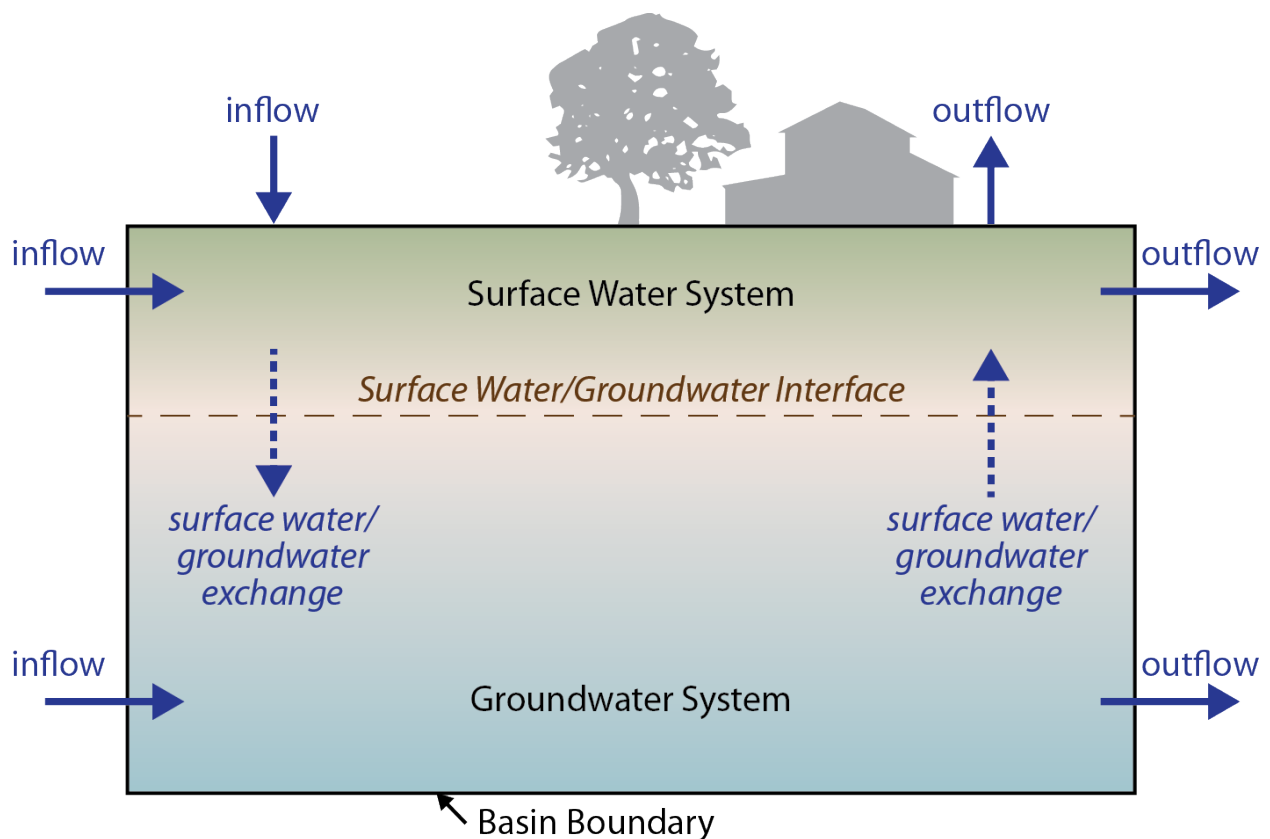


Figure 4 – Conceptual Basin Boundary, Surface Water and Groundwater Systems, and Inflows and Outflows

The surface water system is represented by water at the land surface within the lateral boundaries of the basin. Surface water systems include lakes, streams, springs, and man-made conveyance systems (including canals, drains, and pipelines). Near-surface processes such as stream underflow, infiltration from surface water systems or outflow due to evapotranspiration from the root zone are often included for convenience as part of the surface water accounting. Root zone processes may also be accounted for explicitly by defining a separate land surface system and quantifying exchanges with the surface water system and groundwater system, as well as exchanges with the atmosphere. An example of explicit accounting for the land surface system is provided later in this document based on water budgets prepared as part of the California Water Plan (DWR Bulletin 160).

The groundwater system is represented by that portion of the basin from the ground surface to the definable bottom of the basin, extending to the lateral boundary of the basin. The groundwater system will be characterized by one or more *principal aquifers* and represents the physical basin area used to quantify the annual change in volume of groundwater stored, as required in the water budget. The same three-dimensional basin area should also be used for GSAs to optionally identify the volume of groundwater in storage or the *groundwater storage capacity*, as necessary, to assist in the determination of sustainable yield.

23 CCR §354.20(a). Management Areas: *Each Agency may define one or more management areas within a basin if the Agency has determined that creation of management areas will facilitate implementation of the Plan. Management areas may define different minimum thresholds and be operated to different measurable objectives than the basin at large, provided that undesirable results are defined consistently throughout the basin.*

Management Areas: Although the GSP Regulations only require quantification of water budget components for the basin, each GSA may choose to further subdivide and report the water budget by one or more management areas to help facilitate GSP implementation, and to help demonstrate GSP substantial compliance to the Department under §355.2 of the GSP Regulations (*Department Review of Adopted Plan*). If management areas are developed, additional information and graphics will be needed to define the names, locations, and distribution of management areas within the basin. Graphical representations of the physical setting and characteristics of the basin will be largely provided under HCM requirements in §354.14 of the GSP Regulations.

23 CCR §357.4(a). Coordination Agreements: *Agencies intending to develop and implement multiple Plans pursuant to Water Code Section 10727(b)(3) shall enter into a coordination agreement to ensure that the Plans are developed and implemented utilizing the same data and methodologies, and that elements of the Plans necessary to achieve the sustainability goal for the basin are based upon consistent interpretations of the basin setting.*

Coordination of Water Budget Data: When one or more GSPs are being developed by one or more GSAs for the same basin, §10727(b)(3) of SGMA and §357.4 of the GSP Regulations require a coordination agreement between all GSAs developing a GSP within the basin. As stated in the GSP Regulations citation above, the coordination agreement is to ensure that GSPs are developed and implemented using the same data and methodologies. Specifically, the coordination agreements need to describe how the Agencies utilize the same data and methodologies for the following water budget related components:

- Surface water supply
- Total water use
- Change in groundwater storage
- Water budget
- Sustainable yield

Thus, when presenting water budget information for basins with one or more GSPs, all GSPs for the basin need to identify and describe the existing coordination agreements for the basin, the point of contact of each agreement, how the individual coordinating agencies have taken steps to ensure that each GSP for the basin is utilizing the same data and methodologies for the above water budget components, and how the GSP is fulfilling the coordination requirements identified under §357.4 of the GSP Regulations.

For many basins within the Central Valley, Salinas Valley and elsewhere, not all lateral boundaries for contiguous basins serve as a barrier to groundwater or surface water flow. In situations where a basin is adjacent or contiguous to one or more additional basins, or when a stream or river serves as the lateral boundary between two basins, it is necessary to coordinate and share water budget data and assumptions. This is to ensure compatible sustainability goals and accounting of groundwater flows across basins, as described in §357.2 (Interbasin Agreements) of the GSP Regulations.

As described in SGMA, the Department shall evaluate whether a GSP adversely affects the ability of an adjacent basin to implement its GSP or impedes the ability to achieve its sustainability goal. In order to adequately evaluate this condition, in many cases this will necessitate GSA coordination and sharing of water budget data, methodologies, and assumptions between contiguous basins including:

- Accurate accounting and forecasting of surface water and groundwater flows across the basin boundaries
- Application of best available data and the best available science

In these interbasin situations, it is highly recommended that water budget accounting describe how individual agencies took steps to ensure that each GSP for the basin is utilizing compatible data and methodologies for the water budget components identified under interbasin coordination in §357.4 of the GSP Regulations.

Accounting and Quantification of Water Budget Components

23 CCR §354.18(b): The water budget shall quantify the following, either through direct measurements or estimates based on data:

- (1) Total surface water entering and leaving a basin by water source type.*
- (2) Inflow to the groundwater system by water source type, including subsurface groundwater inflow and infiltration of precipitation, applied water, and surface water systems, such as lakes, streams, rivers, canals, springs and conveyance systems.*
- (3) Outflows from the groundwater system by water use sector, including evapotranspiration, groundwater extraction, groundwater discharge to surface water sources, and subsurface groundwater outflow.*
- (4) The change in the annual volume of groundwater in storage between seasonal high conditions.*
- (5) If overdraft conditions occur, as defined in Bulletin 118, the water budget shall include a quantification of overdraft over a period of years during which water year and water supply conditions approximate average conditions.*
- (6) The water year type associated with the annual supply, demand, and change in groundwater stored.*
- (7) An estimate of sustainable yield for the basin.*

Accounting of the water budget components includes: 1) an annual quantification of inflows and outflows across the basin boundaries, 2) the exchange of water between the surface water system and groundwater system, and 3) the change in volume of groundwater in storage. Surface water entering and leaving the basin and inflow to the groundwater system must be accounted for by water source type. Outflows from the

groundwater system must be accounted for by *water use sector*. The annual accounting of surface water entering and leaving the basin should also include the annual change in surface water storage within lakes and reservoirs that contribute significant water supplies to the basin.

The GSP water budget components are conceptually illustrated in the water budget schematic shown previously in **Figure 4**. **Figure 5** expands upon **Figure 4** by depicting the individual water budget components identified by the GSP Regulations.

Quantification of the annual water budget inflows, outflows, and change in storage for the basin is to be generated by water year through direct measurements or estimates based on data. As previously discussed, the water budget must also be based on best available information and science. Methods to quantify water budget components may vary depending on basin-specific conditions, best available information, and the consideration of uncertainties associated with each method. Methods may change over time as monitoring networks are improved and data gaps are filled.

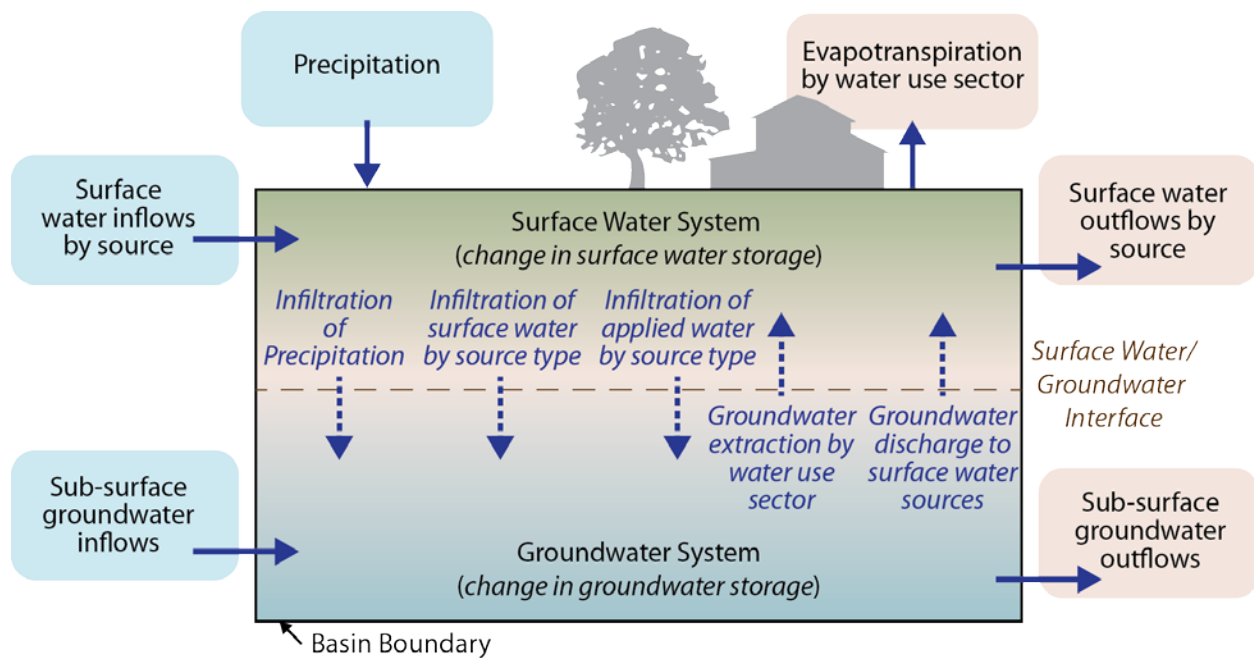


Figure 5 – Required Water Budget Components

Additional discussion regarding consideration of direct and indirect approaches to quantify water budget components is provided under *Identifying and Selecting Methodologies to Estimate Water Budget Components*. Information describing potential data sources to support quantification of change in storage is provided later in this section

under *Water Budget Data Resources*, including data to be provided by the Department specifically for the purpose of supporting GSP water budget development.

The following information provides a breakdown of the seven overarching water budget component requirements listed above and included in §354.18(b) of the GSP Regulations.

(1) Total surface water entering and leaving the basin by water source type.

Water budget components associated with the river and stream system include the surface water entering (inflow) and leaving the basin (outflow). The inflow and outflow of surface water to the basin is required to be annually quantified as a total annual volume in acre-feet per year (af/yr) according to the surface water body (name) and the water sources type. Water source type represents the source from which water is derived to meet the applied beneficial uses. Surface water sources should be identified as one of the following:

- Central Valley Project
- State Water Project
- Colorado River Project
- Local supplies
- Local imported supplies

Much of the surface water flowing into the basin is diverted and applied to meet the beneficial uses within the basin. It is recommended that total annual volume of applied surface water (af/yr) also be quantified according to the appropriate water use sector and the total applied water area (acres). For urban water suppliers, the diverted and applied surface water use should include the total annual volume of use for all urban areas within the basin and the average daily gallons of per capita use (gpcd) for the basin. A breakdown of the applied surface water accounting by basin and by water use sector is provided as follows:

- Urban: total annual volume (af/yr) and the average daily per capita use (gpcd)
- Industrial: total annual volume (af/yr) and total applied water area (acres)
- Agricultural: total annual volume (af/yr) and applied water area (acres)
- Managed Wetlands: total annual volume (af/yr) and applied water area (acres)
- Managed Recharge: total annual volume (af/yr) and applied water area (acres)
- Native Vegetation: total annual volume (af/yr) and applied water area (acres)
- Other (as needed): total annual volume (af/yr) and applied water area (acres)

Applied surface water supply may be further subdivided by *management area* as needed to facilitate water budget accounting and to help demonstrate GSP substantial compliance under §355.2 of the GSP Regulations.

Surface Water Available for Groundwater Recharge or In-Lieu Use: In addition to the above GSP Regulation requirement to include an accounting of the total surface water entering and leaving the basin, §10727.2(d)(5) of SGMA requires the GSP include a description of the surface water supply used, or available for use, for groundwater recharge or in-lieu use.

The Department currently estimates the volume of water available for replenishment of the groundwater in the State. The statewide water available for replenishment is being estimated on a regional basis. This regional estimate will not fulfill the SGMA requirement to identify the surface water supply used, or available for use, for groundwater recharge or in-lieu use at the basin level. However, the Department's process, methods, and sources of data for surface water supply availability should provide valuable assistance to GSAs. The Department's report on Water Available for Replenishment is currently under development.

(2) Inflow to the groundwater system by water source type, including subsurface groundwater inflow and infiltration of precipitation, applied water, and surface water systems, such as lakes, streams, rivers, canals, springs and conveyance systems.

Oil & Gas Field-Produced Water

Significant quantities of water are produced as a by-product of oil and gas extraction in some basins. Where applicable, it is important to characterize this water in terms of aquifer depletion, beneficial use, quality, and reliability.

- **Aquifer Depletion.** Oil and gas-bearing formations are often at a depth below the groundwater flow system. Is the quantity of produced water accounted for in the hydrogeologic conceptual model? Will depletion of this water cause Undesirable Results such as subsidence?
- **Beneficial Use.** Describe the uses for the produced water. Is the produced water being supplied as a beneficial use such as irrigation or recharge, or is it being evaporated? If so, it should be included as a water supply type in the water budget accounting.
- **Quality.** Describe the quality of the produced water, existing use permits, and any treatment processes employed. Describe the use or discharge relative to RWQCB Basin Plan Objectives.
- **Reliability.** Availability of produced water will fluctuate with oil and gas production. Oil fields have limited production durations that may be incompatible with long-term groundwater sustainability. Oil field-produced water will generally not be an acceptable supply for establishing sustainability, but may be a component of an initial basin recovery effort. The reliability of produced water should be characterized in the GSP if it is being use as a source of supply.

Inflows to the groundwater system are to be annually quantified by water year type for the basin as the total annual volume (af/yr) according to the water source type and water use sector.

An accounting of inflows to the groundwater systems should include, but may not be limited to, the following:

- Subsurface groundwater inflow (af/yr)
- Infiltration of precipitation (af/yr)
- Infiltration of applied water (af/yr)
- Infiltration from surface water systems (af/yr)
- Infiltration or injection from managed recharge projects (af/yr)

It is also important to identify and account for inflows or outflows to the groundwater system that may originate from outside the identified basin area. For example, application and infiltration of oil field-produced water should be identified as a separate source of imported water, while the injection of water beneath the definable bottom of the basin should be identified as an outflow from the basin when applicable (see text box discussion of oil field-produced water considerations). In addition, depending on the definable bottom of the basin, groundwater being injected to maintain a *seawater intrusion* barrier may need to be recognized as an outflow from the groundwater basin. Subsurface outflow needed to prevent seawater intrusion should be quantified.

For areas having *Urban Water Management Plans* (UWMP) or *Agricultural Water Management Plans* (AWMP), the GSP water budget assessment of urban and agricultural areas should be consistent with the water budget reporting in the most recent UWMPs and AWMPs, unless more recent information is available.

(3) Outflows from the groundwater system by water use sector, including evapotranspiration, groundwater extraction, groundwater discharge to surface water sources, and subsurface groundwater outflow.

An annual accounting of groundwater outflow from the basin should be total volume (ac-ft) by water source type and water use sector. Sources of groundwater outflow should include, but not be limited to, the following:

- Evapotranspiration: (af/yr)
- Groundwater discharge to surface water sources (af/yr)
- Subsurface groundwater outflow (af/yr)

- Groundwater extraction by water use sector:
 - Urban (af/yr) and (gpcd)
 - Industrial (af/yr)
 - Agricultural (af/yr)
- Managed Wetlands (af/yr)
- Managed Recharge (af/yr)
- Infiltration from the following: (af/yr)
 - Native vegetation (af/yr)
 - Other (as needed)

Note: if oil and gas production wells are producing or applying water within the basin, as defined in the HCM, an accounting of the produced water is to be included as a source of applied water.

Outflows from the groundwater system may be further subdivided by management area as needed to facilitate water budget accounting and to help demonstrate GSP substantial compliance under §355.2 of the GSP Regulations.

(4) The change in the annual volume of groundwater in storage between seasonal high conditions.

In addition to the inflow and outflow components of the water budget, the annual change in the volume of groundwater in storage (af/yr) is required to be provided in tabular and graphical form according to water year type and the associated total annual volume of groundwater extraction for the basin. In addition, the GSP should provide some level of discussion regarding the variation between annual change of groundwater in storage versus annual changes in surface water supply, water year type, water use sector, sustainable yield and overdraft conditions (if present or potentially present).

The change in groundwater in storage is the total change in storage between *seasonal high* conditions, which typically occurs in the spring. It is recommended that the change in storage estimates be based on observed changes in groundwater levels within the basin. However, change in groundwater storage may also be calculated as the difference between annual inflows and outflows according to the water budget equation in Section 3, where all inflows and outflows can be reliably measured or estimated.

Similar to other water budget components, the method to quantify change in storage will likely vary depending on basin-specific conditions and available information, and include consideration of uncertainties associated with each method.

Assessment of change in storage under future water budget projections may require the use and application of a groundwater flow model. If a model is used to estimate future changes in groundwater storage, the Modeling BMP should be followed.

Changes in surface water storage (reservoirs, lakes, and ponds) will also be an important water budget component in some basins. For these basins, change in storage should be identified as change in groundwater storage and surface water storage.

The annual change in groundwater storage may also be further subdivided according to *management areas*, as needed, to help facilitate water budget accounting and to help demonstrate GSP substantial compliance under §355.2 of the GSP Regulations.

(5) If overdraft conditions occur, as defined in Bulletin 118, the water budget shall include a quantification of overdraft over a period of years during which water year and water supply conditions approximate average conditions.

The GSP water budget must include an assessment of *groundwater overdraft* conditions. Determination of overdraft conditions requires the evaluation of current and historical water budget conditions. As described in DWR Bulletin 118, overdraft occurs when groundwater extraction exceeds groundwater recharge over a period of years, resulting in a decrease in groundwater storage.

Overdraft conditions should be assessed by calculating change in groundwater storage over a period of years during which water year and water supply conditions approximate average conditions. Overdraft conditions should be evaluated as changes in groundwater storage by water year type. For basins without an existing water year index, water year types will be developed, classified, and provided by the Department based on annual precipitation as a percentage of the previous 30-year average precipitation for the basin. Water year classifications will be divided into five categories ranging from wet, above normal, below normal, dry, to critically dry conditions.

Single-year reduction in groundwater storage during critical, dry or below normal water years may not represent overdraft conditions. Reductions in groundwater storage in above normal or wet years or over a period of average water year conditions may indicate overdraft conditions. All annual change in groundwater storage estimates from water budget accounting should be included and discussed in the GSP.

If overdraft conditions are identified, the GSP shall describe projects or management actions, including a quantification of demand reduction or other methods, for the mitigation of overdraft, as required under §354.44(b)(2) of the GSP Regulations.

When evaluating if the GSP is likely to achieve the sustainability goal for the basin, the Department will consider whether the GSP includes a reasonable assessment of overdraft conditions and a reasonable means to mitigate overdraft as required under §354.4(b)(6) of the GSP Regulations.

(6) The water year type associated with the annual supply, demand, and change in groundwater stored.

In order for local resource managers to develop an understanding of the relationship between changing hydrologic conditions and the associated aquifer response to changing water supply, demand, and storage, the GSP water budget accounting must be reported according to water year type. Even though the GSP Regulations only require annual water budget accounting and reporting, in order for local water resource managers to adequately understand the timing and distribution of water supply and demand and to implement effective water management actions, local water budget accounting may need to be conducted on a monthly or more frequent basis. As mentioned previously in the overdraft discussion, water year types will be developed, classified, and provided by the Department for those basins not having an existing water year index. GSP water budgets detailing supply, demand, and change in groundwater stored according to water year type will help facilitate assessment of overdraft conditions and estimates of sustainable yield for the basin.

(7) An estimate of sustainable yield for the basin

Estimating sustainable yield includes evaluating current, historical, and projected water budget conditions. Sustainable yield is defined in SGMA legislation and refers to the maximum quantity of water, calculated over a base period representative of long-term conditions in the basin, and including any temporary surplus that can be withdrawn annually from a groundwater supply without causing an undesirable result. Water budget accounting information should directly support the estimate of sustainable yield for the basin and include an explanation of how the estimate of sustainable yield will allow the basin to be operated to avoid locally defined undesirable results. The explanation should include a discussion of the relationship or linkage between the estimated sustainable yield for the basin and local determination of the sustainable management criteria (sustainability goal, undesirable results, minimum thresholds, and measureable objectives).

TABULAR AND GRAPHICAL REPRESENTATION OF THE WATER BUDGET COMPONENTS

The water budget information is to be in tabular and graphical form. This presentation of the data may take many forms depending on the sources of water inflow and outflow to the basin and the water use sectors within the basin.

A sample water budget tabulation is illustrated in **Table 1**. **Table 1** includes a listing of required water budget components to support a complete accounting of groundwater basin inflows and outflows. Additional water budget components not explicitly listed in the Regulations may be necessary for some basins in order to adequately evaluate sustainability and to identify and evaluate projects and management actions to address undesirable results. For example, in basins where treated produced water generated from oil and gas operations is used as a source of supply, the annual volume of the produced water being applied for beneficial use should be quantified and described according to water supply type and water use sector.

Additional tables depicting a breakdown of water budget accounting by water use sector and water source type may be needed to better understand the individual supplies and demands for some basins, and the percent of total supply that is met by each water source type.

Multiple graphical depictions of the various water budget components will likely be needed to fully illustrate the water budget accounting in many basins. The graphics should include charts and maps to show the trends and spatial distribution of the various water budget components. A general graphic summarizing the inflows, outflows and change in storage by water year type will be needed to provide an understanding of the overall water balance for the basin by water year type. Graphics and tables should depict complete and separate water budgets for the basin as a whole, the surface water system, and the groundwater system by basin or management area and by water year type. In addition, more detailed maps and figures that separately depict basin inflows and outflows by water source type, water use sector, and water year will likely be needed to better understand the relationship and overall importance of the various water sources and water use sectors.

Water Year:

Water Year Type:

INFLOWS		OUTFLOWS	
Inflow Source	Volume (af/yr)	Outflow Sink	Volume (af/yr)
Surface Water Inflow ^{\1}		Surface Water Outflow ^{\1}	
Precipitation		Evapotranspiration ^{\4}	
Subsurface Groundwater Inflow		Subsurface Groundwater Outflow	
Total Basin Inflow	=====	Total Basin Outflow	=====
Subsurface Groundwater Inflow		Subsurface Groundwater Outflow	
Infiltration of Precipitation		Groundwater Extraction ^{\1}	
Infiltration from Surface Water Systems ^{\2}		Discharge to surface water systems ^{\2}	
Infiltration of Applied Water ^{\3}		Total Groundwater Outflow	=====
Total Groundwater Inflow	=====		
		Change in Surface Storage Volume	
		Change in Groundwater Volume	

\1 by water source type
 \2 lakes, streams, canals, springs, conveyance systems
 \3 includes applied surface water, groundwater, recycled water, and reused water
 \4 by water use sector

Table 1 – Simple Water Budget Tabulation Example

A sample paired bar graphic illustrating balanced water budgets for both the basin and the groundwater system including the required water budget components is presented as **Figure 6**. Each pair of bars shows inflows on the left and outflows on the right. In this illustration, more water flows out of the basin than flows in during the water year, resulting in an annual reduction in groundwater storage.

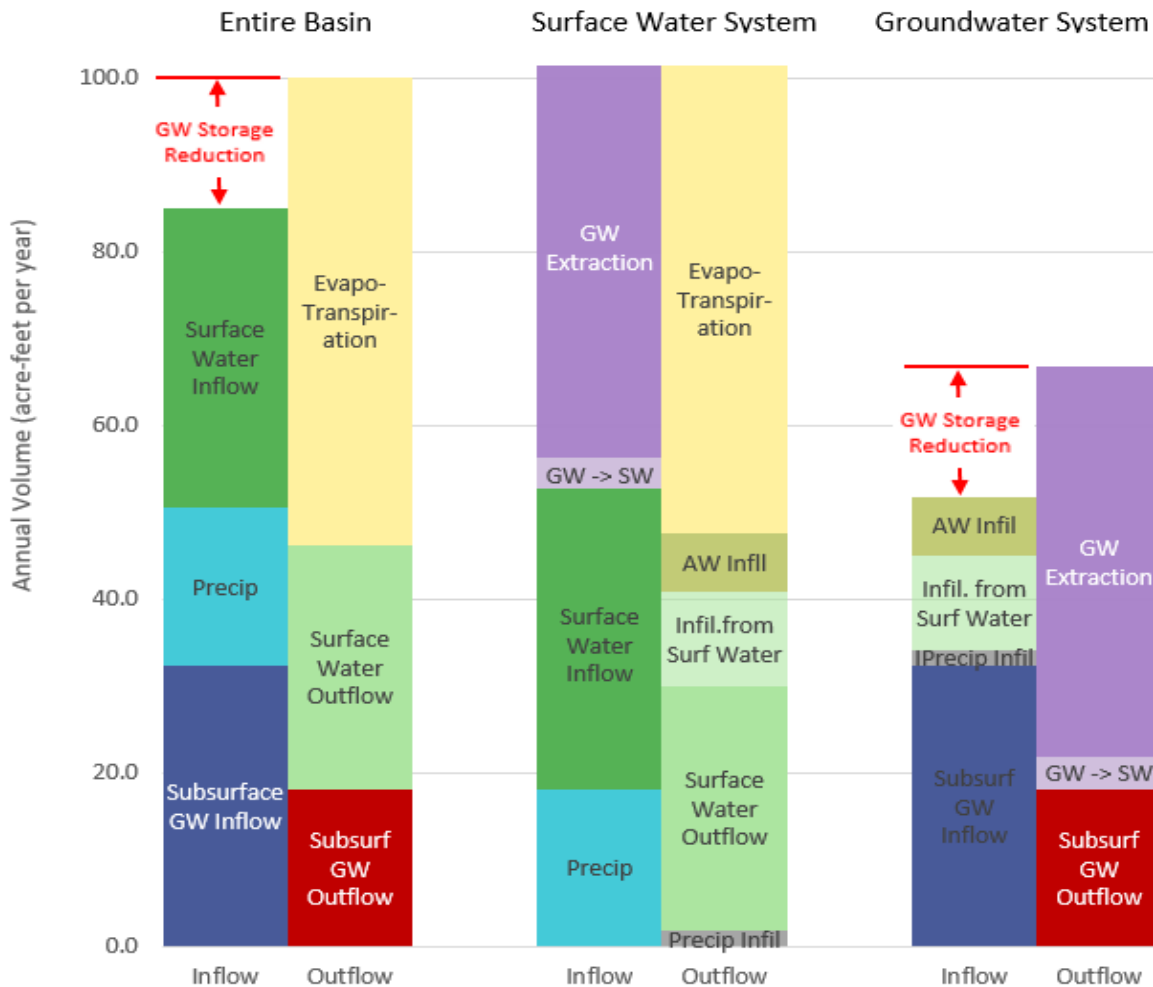


Figure 6 – Paired Bar Water Budgets

Additional graphical examples depicting water supplies and water use by water year type are provided in the Department’s *California Water Plan Update 2013 (Volume 1, Chapter 3, pages 3-33 - 3-40)*, and the *California Groundwater Update 2013 (Chapter 2, pages 17-22)*. Online links to these reports are provided in Section 7, under *Guidance and General References*. Supplementary example graphics are being developed and will be provided as part of the Department’s technical assistance.

An example of a detailed water budget developed by the Department as part of a pilot project to develop water budgets for future California Water Plan updates is provided in the text boxes on the following pages. The example includes hydrologic systems (e.g., the atmospheric system and land surface system) and other water budget components not explicitly required by the GSP Regulations. Conversely, the example does not explicitly include all of the water budget components required by the GSP Regulations. For example, deep percolation from the land surface to the groundwater system is included in the example, as compared to infiltration of precipitation and infiltration of applied water as required by the GSP Regulations. As discussed previously, more detailed accounting than required by the GSP Regulations, including additional components included in the example, may be necessary in some basins to adequately evaluate sustainability, and to identify and evaluate projects and management actions to address undesirable results.

Example of a Detailed Water Budget Including Additional Components Not Identified in the GSP Regulations

It may be useful in some basins to develop water budgets with additional detail not explicitly identified in the GSP Regulations. The following example, based on water budgets being developed as part of future updates of the California Water Plan, illustrates additional water budget components that may be included. **Figure 6** depicts the water budget as a combination of four hydrologic systems, including the atmospheric system, the land surface system, the river and stream system (also including conveyances and lakes and reservoirs), and the groundwater system. In contrast to the GSP Regulations, wherein the land surface system and river and stream system are, in essence, combined to form the surface water system, these systems are broken out explicitly.

Inflows and outflows to and from the user-defined area are illustrated in **Figure 7** as blue and orange arrows, while the flow of water within the user-defined area is shown as a series of purple arrows. Although not specifically depicted in **Figure 7**, the exchange of water in the root zone is included within the lower portion of the land surface system. The unsaturated zone in **Figure 7** is the portion of the subsurface that lies between the land surface system and the groundwater table, which defines the upper portion of the groundwater system. In reality, the thickness and distribution of the unsaturated zone may vary significantly according to the historical groundwater demand and water management practices in the basin. In areas with shallow groundwater conditions, the groundwater system may connect directly to the land surface system, eliminating the unsaturated zone and causing groundwater to discharge directly to the land surface through seeps, wetlands, or springs.

Short descriptions of the various water budget components within the user-defined area for the example are provided below.

River and Stream System: The river and stream system includes an accounting of water budget components for rivers and streams, lakes and reservoirs, and conveyance systems. Water budget components for the river and stream system include surface water entering and leaving the basin or user-defined area (includes imported or exported surface water), as well as the interaction of surface water with the atmospheric, land surface, and groundwater systems within the basin. **Figure 7** shows that inflows to the river and stream system may include stream flows entering into the basin, inflow from rainfall-runoff and agricultural and urban return flow contributions from the land surface system, inflow from the groundwater system, and direct precipitation to the surface water body. Outflows from the river and stream system primarily include diversions, conveyance seepage, streamflow losses to the groundwater, evaporation to the atmospheric system, and stream flows leaving the user-defined area.

Land Surface System: The land surface system includes an accounting of inflows and outflows associated with the various native and managed land use activities. It includes the exchange of water over the land surface, including the root zone, and the exchange of water with the other hydrologic systems within the user-defined area. The root zone occupies the upper portion the land surface where plants extract moisture to meet their water needs. The unsaturated zone is below the land surface system and represents the portion of the basin that receives percolated water from the root zone and either transmits it as deep percolation to the groundwater system or to reuse within the land surface system, or both. Subsurface soil and geologic conditions will help inform estimates of reuse and deep percolation.

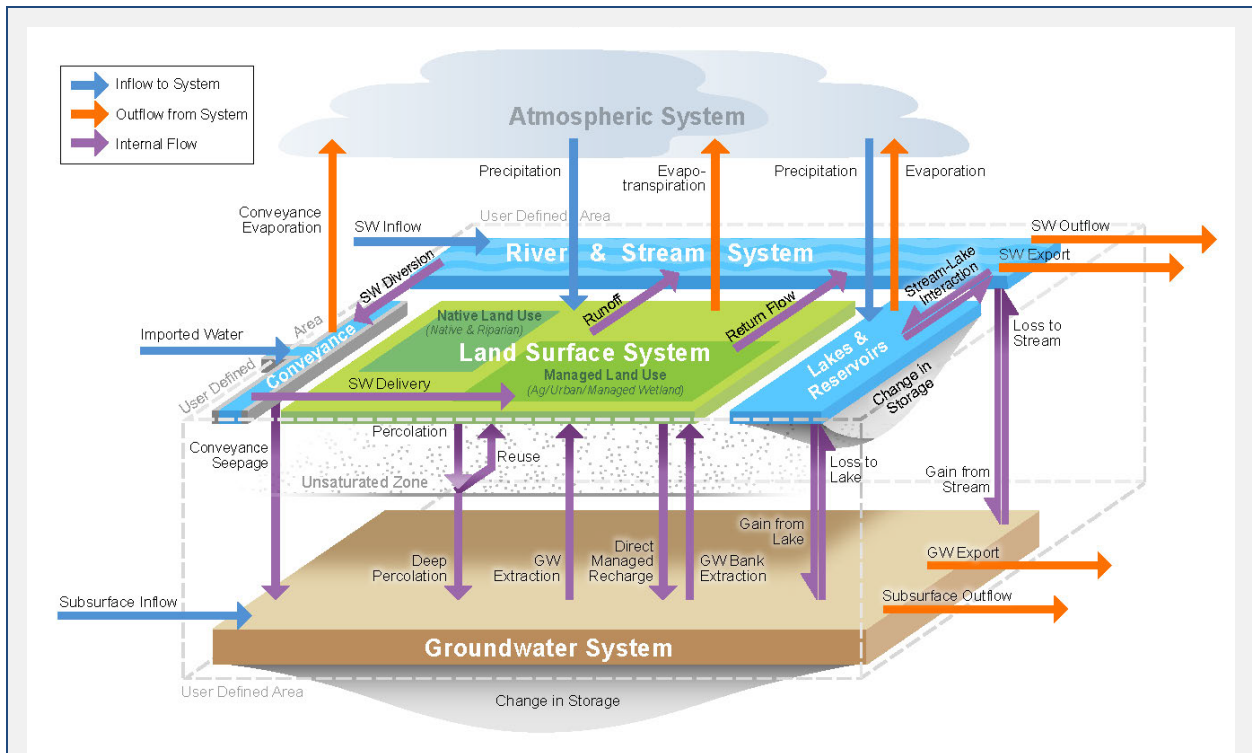


Figure 7 – Water Budget Schematic Showing the Interrelationships among Potential Water Budget Components and the Water Systems that Comprise the Hydrologic Cycle

Inflows to the land surface system may include the inflow of water from diversions from the river and stream system, groundwater extraction, direct precipitation to the land surface, and reuse of percolated water from the unsaturated zone. In areas having a high groundwater table or in locations where the subsurface geology causes outflow from the groundwater system to the land surface, inflows to the land surface system may also come from the capillary movement or direct outflow of groundwater into the land surface system through seeps, wetlands, or springs. Outflows from the land surface system include rainfall-runoff, agricultural and urban return flows to the river and stream system, percolation of precipitation of applied water and direct managed recharge to the groundwater system, and evapotranspiration to the atmospheric system.

Groundwater System: The groundwater system is represented by that portion of the user-defined area extending vertically from the base of the unsaturated zone to the definable bottom of the basin and laterally to the DWR Bulletin 118 basin boundary. In the GSP, the groundwater system will also be characterized by one or more principal aquifers and represent the physical extent of the basin that is used to quantify the annual change in volume of groundwater stored. The same three-dimensional basin should also be used for GSAs to optionally identify the volume of groundwater in storage or the groundwater storage capacity, as necessary, to assist in the determination of sustainable yield.

Inflows to the groundwater system include subsurface groundwater flow entering the user-defined area, deep percolation generated by precipitation and irrigation water infiltrating downward through the root and unsaturated zones, seepage into the aquifer from the river and stream system, and managed recharge through spreading basins or aquifer injection wells. Outflows from the groundwater system primarily include subsurface groundwater outflow leaving user-defined area,

groundwater extraction from wells, and discharge to the river and stream system. Additional outflows from the groundwater system may also occur due to shallow groundwater discharge from seeps, wetlands, and springs. In situations where groundwater rises within the root zone of the land surface system, outflows due to evapotranspiration are typically attributed to the groundwater system.

Based on the detailed water budget example, graphics and tables can be developed to depict complete and separate water budgets for the land surface system, the groundwater system, the river and stream system, and a combination of these systems. These graphics and tables can be developed by water year type for the basin as a whole, by management area, or for other user-defined areas of interest. Examples of graphics depicting water budgets over time for the basin as a whole and for the groundwater system are provided in **Figure 8**. In this figure, the outflows are shown to the left, and the inflows are shown on the right. Annual change in storage may be represented as an inflow or an outflow depending on whether the amount of water in storage increases or decreases during a given time period of interest. An increase in storage is represented as an outflow, while a decrease in storage is represented as an inflow.

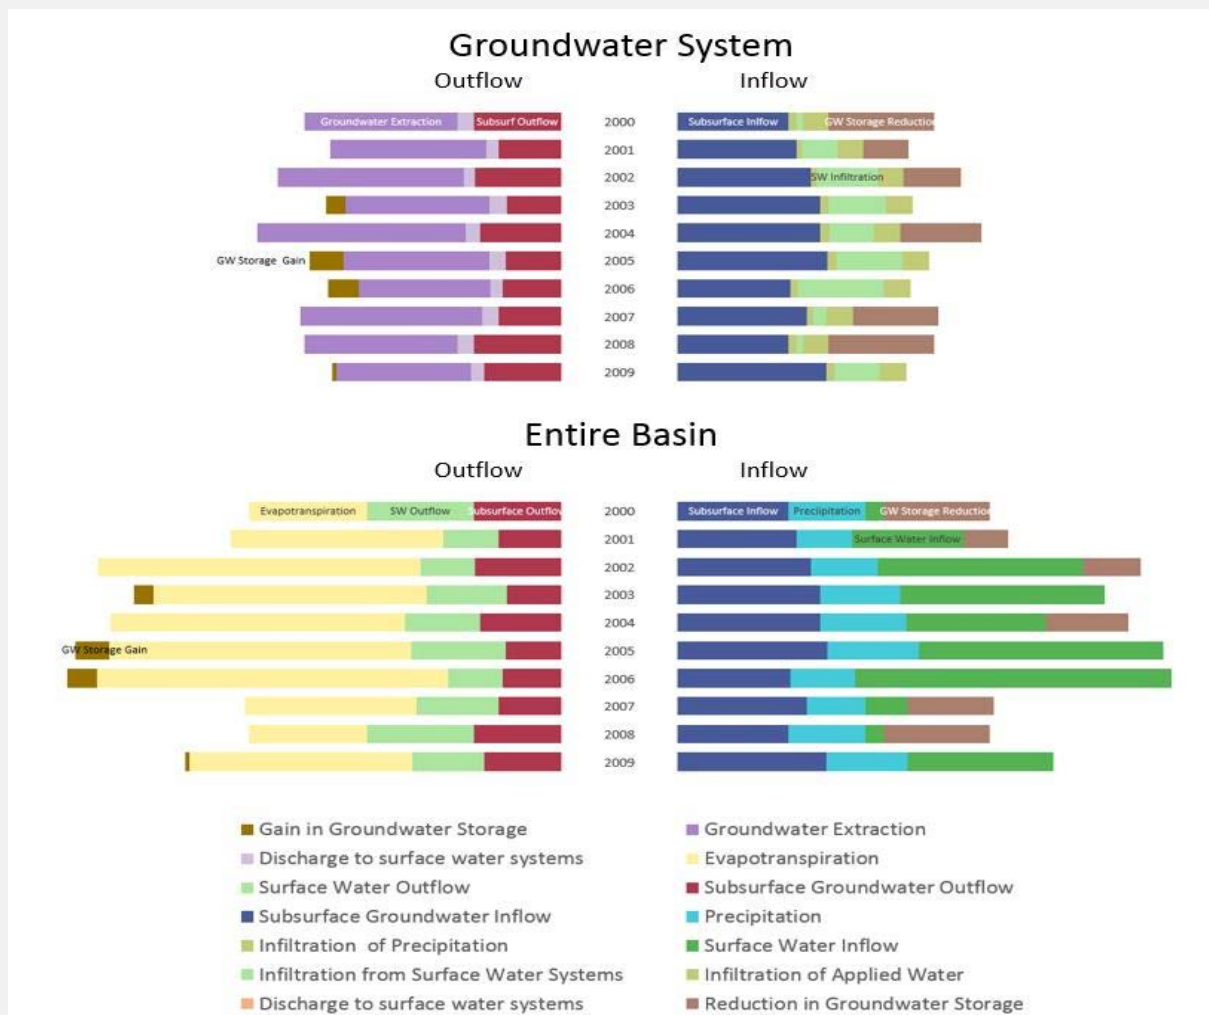


Figure 8 – Water Budget Inflows, Outflows, and Change in Storage by Water Year for Groundwater System and Entire Basin

DEFINING WATER BUDGET TIME FRAMES

23 CCR §354.18(c): Each Plan shall quantify the current, historical, and projected water budget for the basin.

The GSP Regulations require a water budget for current, historical, and projected basin conditions. Descriptions of the water budget requirements are provided below.

Current Water Budget Assessment §354.18(c)(1)

The GSP is required to provide an accounting of current water budget conditions to inform local resource managers and help the Department understand the existing supply, demand and change in storage under the most recent population, land use, and hydrologic conditions. The current water budget is required to quantify all seven of the general water budget requirements listed in §354.18(b).

Historical Water Budget Assessment §354.18(c)(2)

The historical water budget accounting is required to evaluate how past water supply availability or reliability has previously affected aquifer conditions and the ability of the local resource managers to operate the basin within sustainable yield. The historical assessment is specifically required to include the following:

- Use at least the most recent ten years of surface water supply information to quantify the availability of historical surface water supply deliveries. The reliability of historical surface water deliveries is to be calculated based on the planned versus actual annual surface water deliveries, by surface water source, and water year type.
- Quantify and assess at least the most recent ten years of historical water budget information by water year type. The ten years of historical water budget information is to be used to help estimate the projected future water budgets and future aquifer response to the sustainable groundwater management projects and actions being proposed over the GSP planning and implementation horizon. The intent of the historical water budget evaluation is also to provide the necessary data and information to calibrate the tools or methods used to project future water budget conditions. Depending on the historical variability of supplies, demands, and land use; the level of historical groundwater monitoring in the basin; and the type of tool being used to estimate future projects and associated aquifer response; additional historical water budget information may be needed for adequate calibration.

- Use at least the most recent ten years of water supply reliability and water budget information to describe how the historical conditions concerning hydrology, water demand, and surface water supply availability or reliability have impacted the ability of the local agency to operate the basin within sustainable yield. To assist in the evaluation, sustainable yield should be evaluated by water year type, as previously described in (7) *An estimate of sustainable yield for the basin.*

Projected Water Budget Assessment §354.18(c)(3)

The projected water budget accounting is used to quantify the estimated future *baseline conditions* of supply, demand, and aquifer response to GSP implementation. It is also required to evaluate and identify the level of uncertainty in the estimate, and to include historical water budget information to estimate future baseline conditions concerning hydrology, water demand and surface water supply reliability over the 50-year planning and implementation horizon. Methods used to estimate the projected water budget include the following three requirements:

- Use 50 years of historical precipitation, evapotranspiration, and stream flow information as the future baseline hydrology conditions, while taking into consideration uncertainties associated with the estimated climate change and sea level rise projections.
- Use the most recent land use, evapotranspiration, and crop coefficient information as the baseline condition for estimating future water demands, while taking into account future water demand uncertainty associated with projected changes in local land use planning, population growth, and climate.
- Use the most recent water supply information as the baseline condition for estimating future surface water supply, while applying the historical surface water supply reliability identified in §354.18(c)(2) and taking into consideration the projected changes in local land use planning, population growth, and climate.

Time frames required for the evaluation of current, historical, and projected water budget conditions are illustrated graphically in **Figure 9**. The illustration also includes a description of data to be supplied by the Department. Additional discussion of data and data sources is provided in greater detail in subsequent sections of this BMP (*Water Budget Data Resources*).

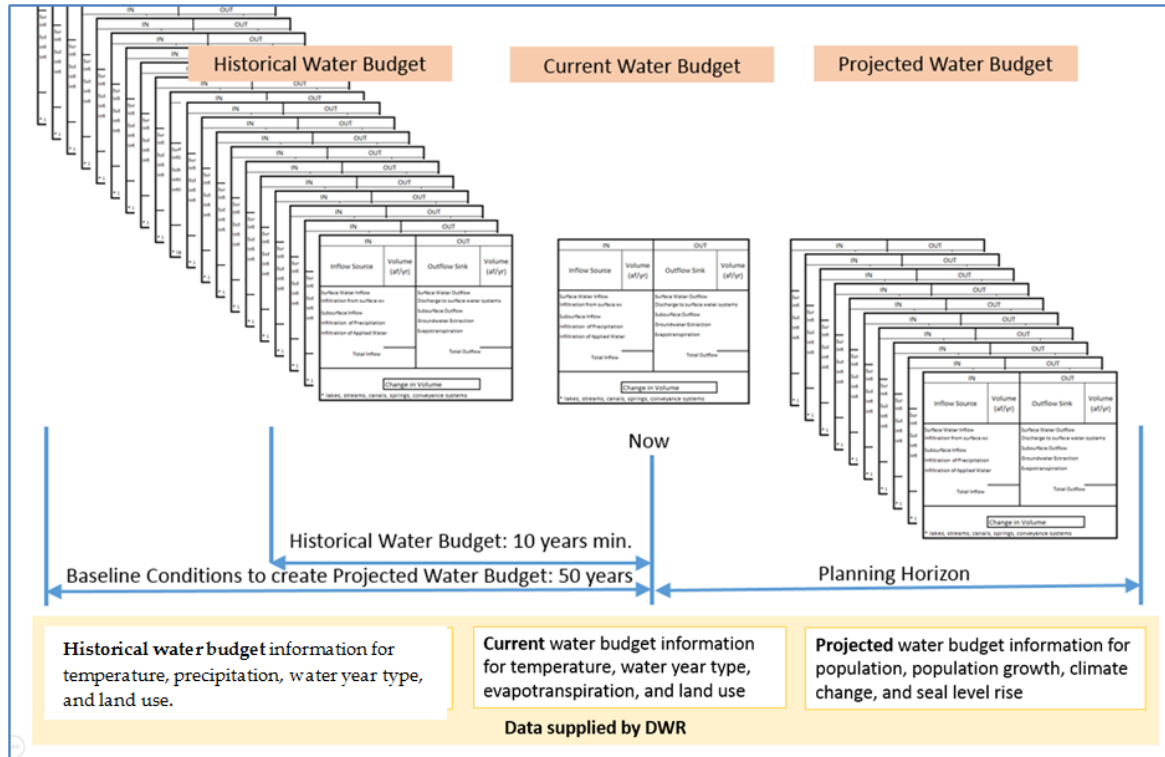


Figure 9 – GSP Water Budget Time Frames

Although the GSP Regulations only require annual quantification of the current, historical, and projected water budget information, in order to adequately assess projected water budget scenarios, GSAs may want to perform water budget accounting on a monthly or even a daily basis, especially if a groundwater model is used to compile and assess future water budget and aquifer conditions. In these situations, model results can be aggregated to annual values to support the GSP and subsequent *annual reporting*. Water budget accounting for shorter than annual time periods provides information necessary to support sustainable management of the basin through more timely evaluation of the water supply and demands by water use sector, of the potential undesirable results, and of the associated need for potential projects and management actions.

IDENTIFYING AND SELECTING METHODOLOGIES TO ESTIMATE WATER BUDGET COMPONENTS

As discussed above, individual components of the water budget may be estimated independently or based on estimates of other water budget components using the water budget equation. A comprehensive review of methodologies for each water budget component is beyond the scope of this BMP; however, the reader is encouraged to review water budget data resources described under *Water Budget Data Resources* and

related materials referenced in Section 7. Selection of a methodology for a particular water budget component should consider the following:

- Whether the basin includes multiple GSAs intending to implement multiple GSPs (requires coordination agreement and description of how the same data and methodology are being used).
- How historical conditions concerning hydrology, water demand, and surface water supply availability or reliability have impacted the ability to operate the basin within sustainable yield.
- Past and current approaches to quantifying water budget components in the basin.
- Alternative approaches representing the best available information and the best available science.
- Data available to support application of the methodology.
- The methods being used for GSP development in adjacent basins.
- The magnitude of the water budget component relative to other components in the basin.
- Accuracy and uncertainty associated with the methodology and supporting data.

Some water budget components lend themselves to direct monitoring and measurement more than others. For example, physical processes at the ground surface, such as surface water diversion, groundwater extraction, and precipitation can be directly measured with a high degree of accuracy, certainty, and reliability using various meters, data loggers, and other readily available monitoring devices. These approaches to monitoring support utilization of the best available science, reflect industry standards, and result in defensible data that meets the uncodified finding of SGMA to collect data necessary to resolve disputes regarding sustainable yield, beneficial uses, and water rights (SGMA Uncodified Findings (b)(3)).

In contrast, other water budget components such as infiltration from surface water systems, subsurface *groundwater flows* across basin boundaries, and seawater intrusion into the basin cannot be measured directly and must be estimated using other approaches.

The methodologies, assumptions, and data sources used to quantify water budget components are to be documented in the GSP. Much of the information needed to

quantify a component of the water budget may be available in existing planning documents and on-line data sources (see *Water Budget Data Resources* below).

As described in the *Coordination of Water Budget Data* section in this BMP, for situations where basin boundaries are adjacent or contiguous to one or more additional basins, or when a stream or river serve as the lateral boundary between two basins, it is recommended that water budget accounting in adjacent basins develop “interbasin” agreements to facilitate exchange of water budget information, as described in §357.2 of the GSP Regulations.

EVALUATING ACCURACY AND UNCERTAINTY OF WATER BUDGET COMPONENTS

Careful consideration should be given to documenting the accuracy and uncertainty of the data being used and in selecting which components are estimated independently versus estimated based on the principle of mass balance, as described above. In all cases, any components estimated based on the water budget equation (Equation 1) should be examined closely for reasonableness. For example, if past experience suggests that a typical value for infiltration of precipitation is around 5 to 10 percent of the total inflow for a given basin, but solution of the water budget equation for infiltration of precipitation results in an estimate of 50 percent of total inflow from infiltration of precipitation, additional examination of the other water budget components is warranted.

Evaluation of accuracy and uncertainty associated with individual water budget components is important because it improves understanding of the sensitivity and range of uncertainty of the various water budget components, which subsequently supports and informs development of GSP sustainable management criteria (§354.22) and projects and management actions (§354.44) that are being implemented and proposed to achieve sustainability.

WATER BUDGET DATA RESOURCES

Data resources to assist in development of a water budget will vary according to past water management studies and water resource investigations conducted in the region. However, several sources of potentially useful information were identified and are described below. These sources include data to be provided by the Department as part of technical assistance to support GSP development and sustainable water management, as well as other available sources of information.

Data Provided by the Department (§354.18(d) and (f))

Data from the Department, as available, to develop the water budget identified in the Regulations includes the following (§354.18(d) and (f)):

- **Historical Information:** Monthly minimum, maximum, and mean temperature and precipitation; water year type for areas outside the Central Valley; and Central Valley land use information.
- **Current Information:** Monthly minimum, maximum, and mean temperature; water year type; evapotranspiration, and statewide land use information.
- **Projected Information:** Population, population growth, climate change, and sea level rise.
- **Modeling Support:** The California Central Valley Groundwater-Surface Water Simulation Model (C2VSIM) and Integrated Water Flow Model (IWFIM).

Agencies developing a water budget may choose to use other data of comparable quality, as allowed by GSP Regulation §354.18(d). As mentioned previously, if a numerical groundwater and surface water model is not used to quantify and evaluate the projected water budget conditions, an equally effective method, tool, or analytical model must be identified and described in the plan (§354.18(e)). A water budget completed outside of a model may be useful as part of model calibration to confirm the reasonableness of water budget produced by the model.

Climate Change and Sea Level Rise. GSP Regulations require future water budget estimates to take into consideration changing climate and sea level rise when evaluating water supply, demand, and reliability for the basin over the planning and implementation horizon. Due to the spatial and temporal complexities associated with evaluating the basin response to changing climate, land use, and proposed projects, it is anticipated that most GSAs will utilize a hydrologic model to evaluate the various potential future basin conditions. In an effort to support consistent GSP analysis of future sustainability conditions, the Department will provide GSAs with a climate change guidance document to qualify data sources and identify acceptable methods for analyzing future climate change conditions for GSP development. These datasets will be publically posted and include future condition estimates of temperature, precipitation, runoff, sea level, and projected SWP and CVP deliveries. The data will not assume implementation of the California WaterFix Program.

Additional Data and Resources

Several other data sources exist in addition to those data specifically identified in the GSP Regulations to be provided by the Department. Some of these include data available from the Department not specifically listed in the GSP Regulations. A summary of data available to support water budget development is provided in **Table 2**. The table is not intended to provide an exhaustive list of data and sources to support water budget development, but rather to provide a reference to data that may be helpful. Specific data selected to support water budget development will depend on methodologies selected to estimate water budget components.

Table 2 – Potential Data Sources to Support Water Budget Development

Data Type	Data Sources	Notes
Air Temperature	DWR, PRISM, CIMIS, NOAA, USBR	Historical and current conditions available from DWR, PRISM, CIMIS, and NOAA. Projected future conditions available from DWR and USBR.
Precipitation	DWR, PRISM, CIMIS, NOAA, NASA, USBR	Historical and current conditions available from DWR, PRISM, CIMIS, NOAA, and NASA. Projected future conditions available from DWR and USBR.
Water Year Type	DWR	
Land Use	DWR, USDA, City, County General Plans, Local Agencies	Historical and current conditions available from DWR, USDA CDL, city & county general plans, and local agencies (including county agricultural commissioners).
Evapotranspiration	DWR, CIMIS, CalSIMETA, UCCE	Historical and current conditions include reference evapotranspiration, total evapotranspiration, and amount of evapotranspiration derived from applied irrigation water. Could include traditional approaches and/or satellite remote sensing approaches.
Population	DWR, State Dept. of Finance, U.S. Census Bureau, UWMPs	Historical and current conditions from Dept. of Finance, U.S. Census, and UWMPs. Projected future conditions from DWR and UWMPs.
Climate Change	DWR, USBR	May include projected temperature, precipitation, evapotranspiration, streamflows, projected project supplies, etc.
Sea Level Rise	DWR	
Applied Water	AWMPs, UWMPs, UCCE, DWR	Historical and current applied irrigation water demands reported in AWMPs, UCCE publications, and DWR reports. Historical, current, and projected urban demands described in UWMPs.
Groundwater Level	DWR, USGS, Local Agencies	DWR sources include GIC and WDL.
Aquifer Thickness and Layering	DWR, USGS, Local/Regional Studies	DWR and USGS sources include C2VSIM and CVHM models and other studies. Local and regional studies and models may also be available.

Data Type	Data Sources	Notes
Aquifer Hydraulic Conductivity	DWR, USGS, Local/Regional Studies	DWR and USGS sources include C2VSIM and CVHM models and other studies. Local and regional studies and models may also be available.
Digital Elevation Model	USGS	Utilized to estimate surface water runoff from precipitation.
Streamflow	DWR, USGS, Local Agencies	DWR sources include CDEC and WDL.
Surface Water Diversions	Local Agencies, SWRCB eWRIMS, DWR, USBR	
Municipal/Industrial Groundwater Pumping	UWMPs	
Agricultural Groundwater Pumping	AWMPs, DWR, USGS	
Specific Yield	DWR, USGS, Local/Regional Studies	DWR and USGS sources include C2VSIM and CVHM models and other studies. Local and regional studies and models may also be available.
Surface Soil Properties	NRCS	
Per-Capita Water Use	UWMPs, DWR, USGS	

Tabled Acronyms:

AWMP – Agricultural Water Management Plan
 C2VSIM – California Central Valley Groundwater-Surface Water Simulation Model
 CalSIMETAW – California Simulation of Evapotranspiration of Applied Water Model
 CDEC – California Data Exchange Center
 CIMIS – California Irrigation Management Information System
 CVHM – Central Valley Hydrologic Model
 DWR – Department of Water Resources
 eWRIMS – Electronic Water Rights Information Management System
 GIC – Groundwater Information Center
 NASA – National Aeronautics and Space Administration
 NOAA – National Oceanic and Atmospheric Administration
 NRCS – Natural Resources Conservation Service
 PRISM –Parameter-elevation Relationships on Independent Slopes Model
 SWRCB – State Water Resources Control Board
 UCCE – University of California Cooperative Extension
 USBR – United States Bureau of Reclamation
 USDA – United States Department of Agriculture
 USGS – United States Geological Survey
 UWMP – Urban Water Management Plan
 WDL – Water Data Library

Additional Data Sources

Additional sources of available information include data from State and federal agencies, research institutions, local water resource management entities, and other local data collection and sharing activities. A partial list of data sources associated with existing water resource management programs are provided below:

- Urban Water Management Plans (UWMPs)
<http://www.water.ca.gov/urbanwatermanagement/>
- Agricultural Water Management Plans (AWMPs),
<http://www.water.ca.gov/wateruseefficiency/agricultural/agmgmt.cfm>
- Groundwater Management Plans (GWMPs),
http://water.ca.gov/groundwater/groundwater_management/GWM_Plans_inCA.cfm
- Integrated Regional Water Management Plans (IRWMPs),
<http://water.ca.gov/irwm/stratplan/>
- Groundwater Ambient Monitoring and Assessment Program (GAMA),
<http://www.swrcb.ca.gov/gama/>
- Irrigated Lands Regulatory Program (ILRP)
http://www.waterboards.ca.gov/centralvalley/water_issues/irrigated_lands/

A comprehensive list of all available sources of water budget data from state and federal agencies, research institutions, and local water management entities is beyond the scope of this BMP. Some additional sources of water budget-related information from select State and federal agencies are provided below.

Department of Water Resources

- Groundwater Information Center (GIC)
<http://water.ca.gov/groundwater/gwinfo/index.cfm>
- California Statewide Groundwater Elevation Monitoring Program (CASGEM)
<http://water.ca.gov/groundwater/casgem/>
- Water Data Library (WDL)
<http://www.water.ca.gov/waterdatalibrary/>
- California Data Exchange Center (CDEC)
<http://cdec.water.ca.gov/>
- California Irrigation Management Information System (CIMIS)
<http://www.cimis.water.ca.gov/cimis/welcome.jsp>
- Land Use Surveys:
<http://www.water.ca.gov/landwateruse/lusrvymain.cfm>

- Groundwater –Surface Water Simulation Model: The following the Department Bay-Delta site list information for the C2VSim Central Valley Groundwater-Surface water simulation model. This same website contains additional links to the Department water budget tools such as:
 - California Central Valley Groundwater-Surface Water Simulation Model
 - http://baydeltaoffice.water.ca.gov/modeling/hydrology/C2VSim/index_C2VSIM.cfm
 - Integrated Water Flow Model (IWFEM)
 - <http://baydeltaoffice.water.ca.gov/modeling/hydrology/IWFEM/index.cfm>
 - Irrigation Demand Calculator (IDC)
 - http://baydeltaoffice.water.ca.gov/modeling/hydrology/IDC/index_IDC.cfm
 - CalLite: Central Valley Water Management Screening Model
 - <http://baydeltaoffice.water.ca.gov/modeling/hydrology/CalLite/index.cfm>
 - Water Resource Intergraded Modeling System (WRIMS) model engine (formally named CALSIM)
 - <http://baydeltaoffice.water.ca.gov/modeling/hydrology/CalSim/index.cfm>
 - Delta Simulation Model II (DSM2)
 - <http://baydeltaoffice.water.ca.gov/modeling/deltamodeling/models/dsm2/dsm2.cfm>
- Bulletin 118
- <http://water.ca.gov/groundwater/bulletin118/index.cfm>
- California Groundwater Update 2013
- <http://www.water.ca.gov/waterplan/topics/groundwater/index.cfm>
- Bulletin 160: California Water Plan Update 2013
- <http://www.water.ca.gov/waterplan/cwpu2013/final/index.cfm>
- Bulletin 230-81: Index to Sources of Hydrologic Data
- http://www.water.ca.gov/waterdatalibrary/docs/historic/Bulletins/Bulletin_230/Bulletin_230_1981.pdf
- Additional DWR Data Topics
- <http://water.ca.gov/nav/index.cfm?id=106>
- Additional DWR Bulletin and Reports
- <http://water.ca.gov/waterdatalibrary/docs/historic/bulletins.cfm>

State Water Resources Control Board

- Electronic Water Rights Information Management System (eWRIMS)
- http://www.swrcb.ca.gov/waterrights/water_issues/programs/ewrims/
- GeoTracker
- <https://geotracker.waterboards.ca.gov/>

United States Geological Survey:

- Central Valley Hydrologic Model (CVHM)
<http://ca.water.usgs.gov/projects/central-valley/central-valley-hydrologic-model.html>
- Water Data Discovery: <http://water.usgs.gov/data/>
- Surface Water Information: <http://water.usgs.gov/osw/>
- Groundwater Information Pages: <http://water.usgs.gov/ogw/>

Additional USGS Water Budget Related Materials by Topic***Developing a Water Budget***

This USGS Circular is a general reference for developing a water budget; it includes the key components of the water budget, exchanges of water between these components, and case studies of water-budget development and the use of water budgets in managing hydrologic systems. <http://pubs.usgs.gov/circ/2007/1308/>

Recharge Estimation

Modeling, field-based, and other methods have been used to estimate recharge. Those included here are examples of methods potentially applicable to relatively large areas. A comprehensive overview of recharge estimation methods is available in this book: <https://pubs.er.usgs.gov/publication/70156906>.

This USGS report is a compilation of methods and case studies for recharge estimation in the arid and semiarid southwestern U.S., including eastern and southeastern California: <http://pubs.usgs.gov/pp/pp1703/index.html>

Modeling of Recharge

Basin Characterization Model (BCM): developed by USGS for use in estimating natural recharge, and has been applied to all of California and other regions in the western US and internationally. This regional water-balance model differs from rainfall-runoff models because it incorporates estimates of shallow bedrock permeability to spatially distribute in-place natural recharge across the landscape. Content on the website below describes the model and associated methods, and provides links to output datasets available for historical and future projections of climate, and to associated publications of applications. The BCM is currently undergoing revisions to further improve the accuracy of recharge estimates for California; these revisions will be completed in mid-2017.

http://ca.water.usgs.gov/projects/reg_hydro/projects/dataset.html

The Farm Process: a tool developed by the USGS to improve the estimation of recharge (and pumping) associated with irrigated agriculture. It is available in various versions of MODFLOW; the most recent version is in MODFLOW-OWHM.

- Primary documentation, Version 1: <http://pubs.usgs.gov/tm/2006/tm6A17/>
- Documentation of Version 2: <http://pubs.usgs.gov/tm/tm6a32/>
- Version 3 is in MODFLOW-OWHM:
<http://water.usgs.gov/ogw/modflow-owhm/>

GSFLOW: a coupled ground-water and surface-water flow model developed by the USGS and based on the integration of the Precipitation-Runoff Modeling System (PRMS) and the Modular Ground-Water Flow Model (MODFLOW-2005). Features of both PRMS and MODFLOW aid in recharge estimation. <http://pubs.usgs.gov/tm/tm6d1/>

SWB: a modified Thornthwaite-Mather soil-water-balance code developed by the USGS for estimating groundwater recharge. <http://pubs.usgs.gov/tm/tm6-a31/>

INFIL: a grid-based, distributed-parameter watershed model developed by the USGS, for estimating net infiltration below the root zone. The link below provides documentation of the model, the associated software, and examples of applications. <http://water.usgs.gov/nrp/gwsoftware/Infil/Infil.html>

Case Studies for Recharge Estimation using Modeling

MODFLOW: Natural recharge estimates, and uncertainty analysis of recharge estimates, using a regional-scale model of groundwater flow and land subsidence, Antelope Valley, California. <https://pubs.er.usgs.gov/publication/70155814>

INFIL: Estimating spatially and temporally varying recharge and runoff from precipitation and urban irrigation in the Los Angeles Basin, California. <http://dx.doi.org/10.3133/sir20165068>

Geophysical Methods for Estimating Recharge

This USGS report describes many geophysical methods for investigating groundwater recharge; it includes case studies and a list of references for further information.

http://pubs.usgs.gov/pp/pp1703/app2/pp1703_appendix2.pdf

Surface-Water/Groundwater Interactions

- This USGS Circular is a general reference for groundwater and surface water, and their interdependence: <http://pubs.usgs.gov/circ/circ1139/>

- This USGS Circular describes the process of streamflow depletion by wells, and ways of understanding and managing the effects of groundwater pumping on streamflow: <http://pubs.usgs.gov/circ/1376/>
- This USGS document outlines *Field Techniques for Estimating Water Fluxes Between Surface Water and Ground Water*: <http://pubs.usgs.gov/tm/04d02/>
- This USGS document identifies methodologies for *Using Diurnal Temperature Signals to Infer Vertical Groundwater-Surface Water Exchange*: <http://onlinelibrary.wiley.com/doi/10.1111/gwat.12459/abstract>

Baseflow Analysis

- General link to USGS software associated with baseflow analysis
<http://water.usgs.gov/software/lists/groundwater#flow-based>
- U.S. Geological Survey Groundwater Toolbox, A Graphical and Mapping Interface for Analysis of Hydrologic Data (Version 1.0)—User Guide for Estimation of Base Flow, Runoff, and Groundwater Recharge From Streamflow Data: <http://pubs.usgs.gov/tm/03/b10/> and <http://water.usgs.gov/ogw/gwtoolbox/>

Streamflow Trend Evaluation

User Guide to Exploration and Graphics for RivEr Trends (EGRET) and dataRetrieval: R Packages for Hydrologic Data: <http://pubs.usgs.gov/tm/04/a10/>

Water Use

Guidelines for preparation of State water-use estimates for 2005:
<http://pubs.usgs.gov/tm/2007/tm4e1/>

Climate-Related Analysis

HydroClimATe: Hydrologic and Climatic Analysis Toolkit:
<http://pubs.usgs.gov/tm/tm4a9/>

BCM Time Series Graph Tool: Enabling analyses of climate and hydrology variables, including recharge and runoff, for all HUC-8 watersheds in California for historical and future climates: <http://climate.calcommons.org/article/about-bcm-time-series-graph-tool>

Climate Smart Watershed Analyst: Enabling analyses of climate and hydrology variables, for time series and seasonality for planning watersheds in the San Francisco Bay Area for historical and future climates: <http://geo.pointblue.org/watershed-analyst/>

6. KEY DEFINITIONS

The key definitions related to Water Budget development outlined in applicable SGMA code and regulations are provided below for reference.

SGMA Definitions ([California Water Code §10721](#))

(b) “Basin” means a groundwater basin or subbasin identified and defined in Bulletin 118 or as modified pursuant to Water Code § 10722.

(c) “Bulletin 118” means the department’s report entitled “California’s Groundwater: Bulletin 118” updated in 2003, as it may be subsequently updated or revised in accordance with § 12924.

(r) “Planning and implementation horizon” means a 50-year time period over which a groundwater sustainability agency determines that plans and measures will be implemented in a basin to ensure that the basin is operated within its sustainable yield.

(t) “Recharge area” means the area that supplies water to an aquifer in a groundwater basin.

(v) “Sustainable groundwater management” means the management and use of groundwater in a manner that can be maintained during the planning and implementation horizon without causing undesirable results.

(w) “Sustainable yield” means the maximum quantity of water, calculated over a base period representative of long-term conditions in the basin and including any temporary surplus, that can be withdrawn annually from a groundwater supply without causing an undesirable result.

(x) “Undesirable result” means one or more of the following effects caused by groundwater conditions occurring throughout the basin:

- (1) Chronic lowering of groundwater levels indicating a significant and unreasonable depletion of supply if continued over the planning and implementation horizon. Overdraft during a period of drought is not sufficient to establish a chronic lowering of groundwater levels if extractions and groundwater recharge are managed as necessary to ensure that reductions in groundwater levels or storage during a period of drought are offset by increases in groundwater levels or storage during other periods.
- (2) Significant and unreasonable reduction of groundwater storage.
- (3) Significant and unreasonable seawater intrusion.

- (4) Significant and unreasonable degraded water quality, including the migration of contaminant plumes that impair water supplies.
- (5) Significant and unreasonable land subsidence that substantially interferes with surface land uses.
- (6) Depletions of interconnected surface water that have significant and unreasonable adverse impacts on beneficial uses of the surface water.
- (y) “Water budget” means an accounting of the total groundwater and surface water entering and leaving a basin including the changes in the amount of water stored.
- (aa) “Water year” means the period from October 1 through the following September 30, inclusive

Groundwater Basin Boundaries Regulations ([California Code of Regulations §341](#))

- (f) “Aquifer” refers to a three-dimensional body of porous and permeable sediment or sedimentary rock that contains sufficient saturated material to yield significant quantities of groundwater to wells and springs, as further defined or characterized in Bulletin 118.
- (q) “Hydrogeologic conceptual model” means a description of the geologic and hydrologic framework governing the occurrence of groundwater and its flow through and across the boundaries of a basin and the general groundwater conditions in a basin or subbasin.

Groundwater Sustainability Plan Regulations ([California Code of Regulations §351](#))

- (b) “Agricultural water management plan” refers to a plan adopted pursuant to the Agricultural Water Management Planning Act as described in Part 2.8 of Division 6 of the Water Code, commencing with Section 10800 et seq.
- (d) “Annual report” refers to the report required by Water Code §10728.
- (e) “Baseline” or “baseline conditions” refer to historic information used to project future conditions for hydrology, water demand, and availability of surface water and to evaluate potential sustainable management practices of a basin.
- (g) “Basin setting” refers to the information about the physical setting, characteristics, and current conditions of the basin as described by the Agency in the hydrogeologic conceptual model, the groundwater conditions, and the water budget, pursuant to Subarticle 2 of Article 5.

- (h) “Best available science” refers to the use of sufficient and credible information and data, specific to the decision being made and the time frame available for making that decision, that is consistent with scientific and engineering professional standards of practice.
- (l) “Data gap” refers to a lack of information that significantly affects the understanding of the basin setting or evaluation of the efficacy of Plan implementation, and could limit the ability to assess whether a basin is being sustainably managed.
- (n) “Groundwater flow” refers to the volume and direction of groundwater movement into, out of, or throughout a basin.
- (o) “Interconnected surface water” refers to surface water that is hydraulically connected at any point by a continuous saturated zone to the underlying aquifer and the overlying surface water is not completely depleted.
- (q) “Interim milestone” refers to a target value representing measurable groundwater conditions, in increments of five years, set by an Agency as part of a Plan.
- (r) “Management area” refers to an area within a basin for which the Plan may identify different minimum thresholds, measurable objectives, monitoring, or projects and management actions based on differences in water use sector, water source type, geology, aquifer characteristics, or other factors.
- (s) “Measurable objectives” refer to specific, quantifiable goals for the maintenance or improvement of specified groundwater conditions that have been included in an adopted Plan to achieve the sustainability goal for the basin.
- (t) “Minimum threshold” refers to a numeric value for each sustainability indicator used to define undesirable results.
- (aa) “Principal aquifers” refer to aquifers or aquifer systems that store, transmit, and yield significant or economic quantities of groundwater to wells, springs, or surface water systems.
- (ad) “Seasonal high” refers to the highest annual static groundwater elevation that is typically measured in the Spring and associated with stable aquifer conditions following a period of lowest annual groundwater demand.
- (ae) “Seasonal low” refers to the lowest annual static groundwater elevation that is typically measured in the Summer or Fall, and associated with a period of stable aquifer conditions following a period of highest annual groundwater demand.

(af) “Seawater intrusion” refers to the advancement of seawater into a groundwater supply that results in degradation of water quality in the basin, and includes seawater from any source.

(ah) “Sustainability indicator” refers to any of the effects caused by groundwater conditions occurring throughout the basin that, when significant and unreasonable, cause undesirable results, as described in Water Code §10721(x).

(ai) “Uncertainty” refers to a lack of understanding of the basin setting that significantly affects an Agency’s ability to develop sustainable management criteria and appropriate projects and management actions in a Plan, or to evaluate the efficacy of Plan implementation, and therefore may limit the ability to assess whether a basin is being sustainably managed.

(aj) “Urban water management plan” refers to a plan adopted pursuant to the Urban Water Management Planning Act as described in Part 2.6 of Division 6 of the Water Code, commencing with Section 10610 et seq.

(ak) “Water source type” represents the source from which water is derived to meet the applied beneficial uses, including groundwater, recycled water, reused water, and surface water sources identified as Central Valley Project, the State Water Project, the Colorado River Project, local supplies, and local imported supplies.

(al) “Water use sector” refers to categories of water demand based on the general land uses to which the water is applied, including urban, industrial, agricultural, managed wetlands, managed recharge, and native vegetation.

(am) “Water year” refers to the period from October 1 through the following September 30, inclusive, as defined in the Act.

(an) “Water year type” refers to the classification provided by the Department to assess the amount of annual precipitation in a basin.

Bulletin 118 Definitions

“Beneficial use” of water in Bulletin 118 references 23 categories of water uses identified by the State Water Resource Control Board and are listed and briefly described in Appendix E.

“Groundwater overdraft” refers to the condition of a groundwater basin in which the amount of water withdrawn by pumping exceeds the amount of water that recharges the basin over a period of years during which water supply conditions approximate average conditions.

“Groundwater in storage” refers to the quantity of water in the zone of saturation.

“Groundwater Storage Capacity” refers to the volume of void space that can be occupied by water in a given volume of a formation, aquifer, or groundwater basin.

“Safe yield” refers to the maximum quantity of water that can be continuously withdrawn from a groundwater basin without adverse effect

“Saturated zone” refers to the zone in which all interconnected openings are filled with water, usually underlying the unsaturated zone.

7. RELATED MATERIALS

This section provides a list of related materials including associated SGMA BMPs, general references, and selected case studies and examples pertinent to the development of water budgets. For the items identified, available links to access the materials are also provided. By providing these links, DWR neither implies approval, nor expressly approves of these documents.

REFERENCES FOR FURTHER GUIDANCE

- Barlow, P.M., and Leake, S.A., 2012, Streamflow depletion by wells— Understanding and managing the effects of groundwater pumping on streamflow: U.S. Geological Survey, Circular 1376. [<http://pubs.usgs.gov/circ/1376/>]
- Chang, S.W., T.P. Clement, M.J. Simpson, and K.K. Lee. 2011. Does Sea-level Rise Have an Impact on Saltwater Intrusion, *Advances in Water Resources* 34:1283-1291. [http://www.mj-simpson.com/pdf/ADWR_2011.pdf]
- Healy, R.W., Winter, T.C., LaBough, J.W., and Franke, L.O., 2007, *Water Budgets: Foundations for Effective Water-Resources and Environmental Management*. U.S. Geological Survey, Circular 1308. [<http://pubs.usgs.gov/circ/2007/1308/>]
- Loaiciga, H.A., T.J. Pingel, and E.S. Garcia. 2012. Sea Water Intrusion by Sea-level Rise: Scenarios for the 21st Century, *Ground Water*, 50L37-47 [<http://onlinelibrary.wiley.com/doi/10.1111/j.1745-6584.2011.00800.x/abstract>]
- Winter, T.C., Harvey, J.W., Franke, O.L., and Alley, W.M., 1998, *Ground Water and Surface Water, A Single Resource*. U.S. Geological Survey, Circular 1139. [<http://pubs.usgs.gov/circ/circ1139/#pdf>]
- California Water Plan Update 2013. Department of Water Resources, 2013. Volume 3. Resource Management Strategies. [<http://www.water.ca.gov/waterplan/cwpu2013/final/index.cfm>]
- California's Groundwater Update 2013, Department of Water Resources, 2013. [<http://www.water.ca.gov/waterplan/topics/groundwater/index.cfm>]

SELECTED CASE STUDIES AND EXAMPLES

- Development and Calibration of the California Central Valley Groundwater-Surface Water Simulation Model (C2VSim), Version 3.02-CG. DWR Technical Memorandum. California Department of Water Resources (DWR) Bay-Delta Office. 2013. [http://baydeltaoffice.water.ca.gov/modeling/hydrology/C2VSim/download/C2VSim_Model_Report_Final.pdf]
- Groundwater Availability of the Central Valley, California. Professional Paper 1766. USGS. 2009. [http://pubs.usgs.gov/pp/1766/PP_1766.pdf]
- Scott Valley Integrated Hydrologic Model: Data Collection, Analysis, and Water Budget. Final Report. University of California – Davis, Department of Land, Air, and Water Resources. 2013. [<http://groundwater.ucdavis.edu/files/165395.pdf>]
- Selected Approaches to Estimate Water-Budget Components of the High Plains, 1940 through 1949 and 2000 through 2009. Scientific Investigations Report 2011–5183. USGS. 2011. [<http://pubs.usgs.gov/sir/2011/5183/pdf/sir2011-5183.pdf>]
- Simulated Effects of Ground-Water Withdrawals and Artificial Recharge on Discharge to Streams, Springs, and Riparian Vegetation in the Sierra Vista Subwatershed of the Upper San Pedro Basin, Southeastern Arizona. Scientific Investigations Report 2009-5207. USGS. April, 2014. [<http://pubs.usgs.gov/sir/2008/5207/sir2008-5207.pdf>]
- Evaluation of Simulations to Understand Effects of Groundwater Development and Artificial Recharge on Surface Water and Riparian Vegetation, Sierra Vista Subwatershed, Upper San Pedro Basin Arizona. Open-File Report 2012-1206. USGS. 2012. [<https://pubs.usgs.gov/of/2012/1206/of2012-1206.pdf>]

PROFESSIONAL CERTIFICATION RESOURCES

- Professional Engineers Act: http://www.bpelsg.ca.gov/laws/pe_act.pdf
- Professional Geologist and Geophysicist Act: http://www.bpelsg.ca.gov/laws/gg_act.pdf
- Professional License Lookup: http://www.bpelsg.ca.gov/consumers/lic_lookup.shtml